



The AVR voltage regulator and PLC power conditioner product lines consists of over 250 standard units arranged in 29 different voltage families to provide 95% coverage of day-to-day application needs. For ease of application, all units have been kVA rated per the Electrical Industry Equipment Standards for secondary distribution systems. All units are designed to provide $\pm 1\%$ or better output voltage regulation over the entire input voltage range. The complete offering of AVR and PLC products is of a modular design, designed to provide 100% front accessibility for ease of installation, and is enclosed in an indoor ventilated drip-proof enclosure.

The modular PLC power conditioner consists of a standard AVR, a double shielded output isolation transformer, and a transient voltage suppression package, all enclosed in a single modular enclosure. The type "MP" microprocessor controller is standard on all individual phase controlled (IPC) voltage regulators and power conditioners and is offered as an option on all other units. An external bypass, enclosed in its own indoor ventilated drip-proof enclosure, is available as an option to provide both electrical and mechanical isolation from the regulator or power conditioner for ease of scheduled preventive maintenance.

TYPICAL APPLICATIONS

- **BROADCAST:** Regulation for Radio and TV station transmitters, receivers, and mobile production vehicles.
- **COMMERCIAL:** High rise building whole floor regulation or power conditioning, input voltage regulation for elevator control and large A/C chillers.

- **INDUSTRIAL:** Process center power quality improvement, standard or customized test stands for product quality testing or design verification.
- **MARINE:** Dockside or shipboard voltage regulation and power conditioning.
- **MEDICAL:** X-Ray, CAT scan, and MRI power conditioning.

PRODUCT FEATURES

- **RATING:** 2.5 to 1500 kVA arranged in 29 single and three phase voltage families.
- **INPUT:** Wide range +10%, -20% with standard Delta/Delta, Delta/Wye, and Wye/Wye three phase designs.
- **OUTPUT:** $\pm 1\%$ regulation with no wave form distortion.
- **EFFICIENCY:** Low impedance design with a typical efficiency of 99%.
- **OVERLOAD:** 50% one hour, 1000% 30 cycles.
- **HARMONICS:** None added to system.
- **POWER FACTOR LOAD RESTRICTIONS:** None
- **MODULAR DESIGN**
- **ENCLOSURE:** Indoor ventilated drip-proof
- **100% FRONT ACCESSIBILITY**
- **EXTERNAL BYPASS SWITCH**
- **COMMUNICATIONS:** RS-232, RS-422, IEEE-488
- **POWER CONDITIONERS:** Isolation output transformer and voltage suppression package.

Electrical system concerns

- ENERGY EFFICIENCY
- POWER QUALITY
 - VOLTAGE FLUCTUATIONS
 - ODD HARMONICS
 - ELECTRICAL NOISE
 - BROWNOUTS

In today's world, the cost of electrical power and its quality have become major operating concerns. The continuing increase in the cost of electrical power has heighten interest in energy savings and poor power quality has been indentified as a cause of malfunctions and expensive shutdowns in new high technology equipment.

The chart below shows some of the causes and the effects of poor power quality. Filter networks, surge suppressors, and isolation transformers can solve many of the power quality problems that occur, but each can involve system tradeoffs if applied as a stand alone solution. Filter networks tend to be tuned to an existing load condition and if the load changes the engineered network may become ineffective. Surge suppressors shunt voltage transients to ground possibly transforming a line voltage problem into a ground potential problem. Shielded isolation transformers can provide electrical noise attenuation, but like filters and suppressors do not offer protection against voltage fluctuations and brownouts.

However, when surge suppressors and isolation transformers are coupled with a voltage regulator, like Staco's PLC, the combination can provide an excellent solution to these power quality problems.

FOUR TYPES OF REGULATORS

There are four main types of regulators offered in today's market ... Ferroresonant , Tap Switching, Limited Range Variable Transformer, and Variable Transformer Buck-Boost.

FERRORESONANT

Ferroresonant constant voltage transformers use a capacitor in series with the transformer coil and tend to be high impedance devices that are sensitive to load changes and do not handle high inrush loads very well. They can interact with switch mode power supplies to produce transients and electrical noise on the output and their resonant circuits make them particularly sensitive to frequency changes. When applied cautiously these units can provide 2 to 5% output regulation, load isolation, and noise attenuation.

TAP SWITCHING TRANSFORMER

Tap switching transformer based regulators monitor output voltage and then use solid-state switching circuits for changing the transformer taps on a fixed ratio transformer. These units tend to provide only 3 to 5% output regulation as the number of taps used are minimized to control cost. Although these regulators are extremely fast, this fast response time can often create instability when powering equipment with switch mode power supplies and their output waveform tends to produce harmonics and radio frequency interference.

POWER QUALITY PROBLEMS • CAUSES AND EFFECTS

POWER PROBLEM	POSSIBLE CAUSES	EFFECTS
Voltage Fluctuations (Surges, Sags, Spikes)	Overburdened distribution system; Heavy equipment startup; Lightning; Utility grid switching; Unstable generators	System lock-up; Data loss; Control loss; Power supply damage; Lighting flicker
Odd Harmonics	Switch-mode power supplies; Nonlinear loads	High neutral currents; Circuit breaker nuisance tripping; Motor overheating; Transformer overheating
Electrical Noise	Switching devices; Motorized equipment; Improper grounding; Arc welders; Electronic equipment	Data corruption; Timing signal variations; Erroneous command functions; Servo control instability; Changes in processing states
Brownouts	Power line faults; Planned and unplanned utility voltage reduction	Motor overheating; Low lamp output; Reduced equipment performance; System shutdown; Transformer overheating; Data corruption and loss

LIMITED RANGE VARIABLE TRANSFORMER

Limited range variable transformer regulators use variable transformers to directly control the output voltage of the regulator. This places the variable transformer's vulnerable brush and brush track directly in the power path of the regulator subjecting these critical components to system stresses which can lead to possible premature regulator failure. Applications with high overload cycling might require the unit to be oversized and with the variable transformer brushes in the power path, electrical noise can be introduced into the system. While limited range variable transformer regulators can provide ± 1 to 3% output voltage regulation they tend to be larger than the Variable Transformer Buck-Boost Regulator as manufactured by Staco that offer $\pm 1\%$ output regulation.

STACO BUCK-BOOST VOLTAGE REGULATORS SINGLE PHASE REGULATORS

Staco voltage regulators consist of three basic components: a motorized variable transformer, a buck-boost transformer, and a controller.

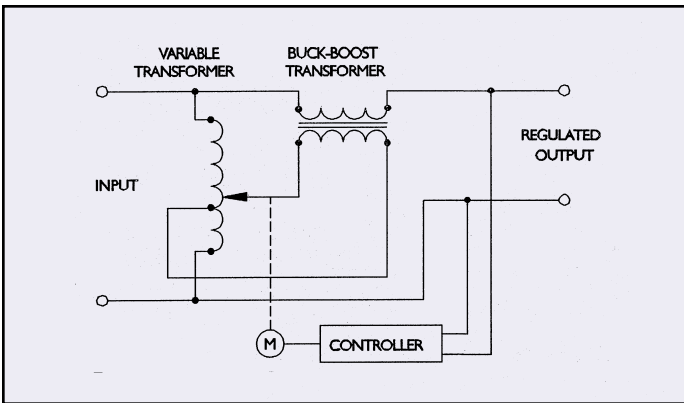


Figure 1. Single Phase Regulator Block Diagram

Input power is applied across the motor driven variable transformer which has a "center tap" that divides the variable transformer into bucking and boosting voltage areas.

The buck-boost transformer is a fixed ratio isolation transformer capable of high amperes at low voltage. The ratio of the buck-boost transformer is determined by the amount of voltage needed to buck or boost the input line voltage to maintain the specified output level. The buck-boost transformer secondary is wired in series with the load and the primary is connected across the variable transformer's "center tap" and brush terminals. Depending on which side of the "center tap" the variable transformer brush is positioned, the variable/buck-boost transformer system will add to (boost) or subtract from (buck) the input line voltage. The further the variable transformer brush is from the "center tap" the more bucking or boosting of voltage will occur.

The key to the proven reliability and long trouble free service life of a Staco Voltage Regulator is in the combination of a motor driven variable transformer with buck-boost transformer technology.

As shown in figure 1, the only active component in the main power path of the voltage regulator is the secondary of the buck-boost transformer. This gives the Staco regulator the advantage of being able to withstand substantial current overloads. The variable transformer brushes, which are the most vulnerable component in any variable transformer system, are completely isolated from overload conditions by the buck-boost transformer. Due to transformer inefficiency above rated design, the amount of current that the buck-boost transformer can induce across to its primary winding and into the variable transformer circuit is dramatically decreased as regulator overload current increases.

The controller monitors the regulator's output voltage and then uses these feedback signals to determine drive commands for the variable transformer motor interface circuit. The controller is designed to adjust the motorized variable transformer to provide a $\pm 1\%$ or better output voltage regulation over the entire input voltage range.

Staco offers two types of controllers. The solid state type LRC controller is standard on type AVR regulators and the micro-processor type MP controller which is offered as standard on all MVR voltage regulators and is available as an option for AVR units.

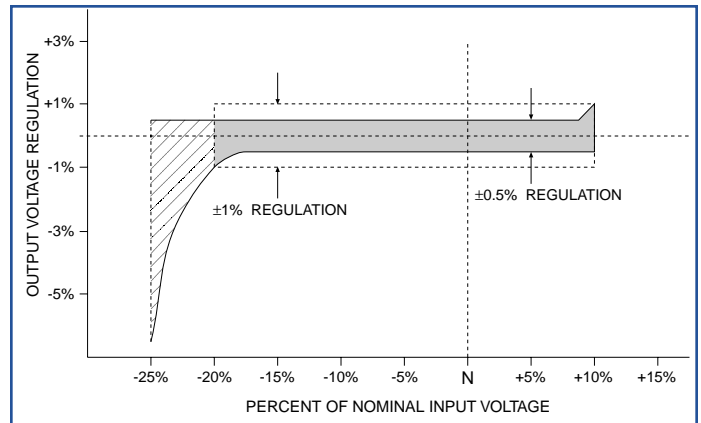


Figure 2. Output Voltage Regulation vs Input Range

Type of Controller	Input Range	Output Regulation	Typical Units
LRC	+9% to -19%	$\pm 0.5\%$	AVR or PLC
	+9% to -10%, -19% to -20%	$\pm 1\%$	
MP	+9% to -19%	± 0.5 VAC	MVR or MLC
	+9% to +10%, -19% to -20%	$\pm 1\%$	

While Staco voltage regulators are designed to provide a maximum output voltage regulation of $\pm 1\%$ with an input voltage range of +10% to -20%, the chart in figure 2 shows the actual regulation curve of a typical Staco voltage regulator. Over an input voltage range of +9% to -19%, the typical Staco regulator will maintain an output regulation of $\pm 0.5\%$.

THREE PHASE REGULATORS

Figure 3 illustrates a block diagram for a three phase voltage regulator. There are still only three basic components, but in a three phase configuration, each phase has its own variable transformer and buck-boost transformer. The three variable transformers are driven by a single motor in what is called a single line control (SLC) configuration.

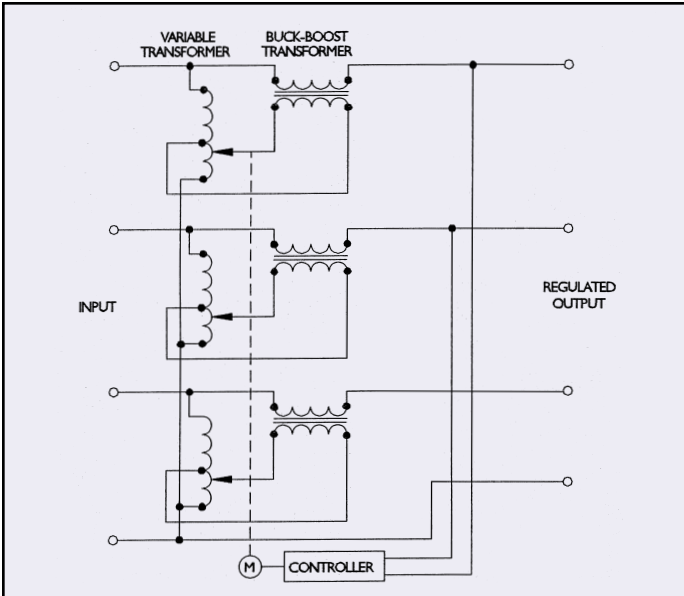


Figure 3. Three Phase Regulator Block Diagram

In figure 3, one phase of the regulator is selected to represent the control feedback for all three phases. The variable transformer in each phase is driven by the single motor and thus the variable transformer brushes in each unit will move by the same amount, in the same direction, and at the same time.

Staco also offers an individual phase control (IPC) voltage regulator design. In an individual phase controlled unit each output phase has its own controller monitored voltage feedback loop, each variable transformer is driven by its own motor, and each output phase is regulated independently of the other phases. Single line control is the design choice for single phase regulators and in three phase regulators for balanced load applications. An individual phase controlled regulator is an excellent design choice for three phase distributed load applications, consisting of both single and three phase loads, as the regulator will provide a regulated and balanced output voltage even under unbalanced line and load conditions.

Complete schematic diagrams covering single and three phase single line controlled and three phase individual phased controlled units may be found on page 9.

STACO CONTROLLERS

THE LRC CONTROLLER

The type LRC controller is the standard controller for both single and three phase single line control (SLC) voltage regulators.



Figure 4. LRC Control Panel

The LRC, limited range controller, utilizes discrete components for feedback voltage monitoring and motor control. The controller uses a half-wave peak detection and conditioning circuit for AC feedback monitoring and an optically isolated triac for 120 volt motor control. The output voltage setpoint is entered through the front panel potentiometer. The resultant signal is compared to the feedback signal to determine drive commands for the motor interface circuit. A second potentiometer on the front panel provides for system deadband and sensitivity control.

THE MP MICROPROCESSOR CONTROLLER

The type MP, microprocessor controller, offers users new flexibility in the control of the regulated output voltage.



Figure 5. MP Control Panel


This intelligent microprocessor based controller is capable of operating in several different modes which can be programmed locally with the panel mounted microterminal or remotely through a RS-232, RS-422, or IEEE-488 bi-directional communication port. The panel mounted microterminal has a LCD display for display of output voltages and setpoints. Multiple set points may be programmed for variable speed, ramping, and variable dwell. The AC feedback signal may be configured to be compatible to the output voltage. It can be user programmed to accept peak to peak, average, or RMS measurements. The MP controller is standard on all three phase individual phase controlled (IPC) MVR regulators and is available as an option on all single and three phase AVR regulators.

WHY CHOOSE A STACO REGULATOR or POWER CONDITIONER...The STACO-PLUS

Staco has been in the AC voltage control and regulation field since 1937. Today, Staco's products reflect this experience. Staco regulators are built for long-term reliability and trouble free operation. High quality components, optimum design, and excellent workmanship go together to ensure many years of satisfactory performance.


Conservative Ratings

Staco regulators are designed to withstand substantial current overloads.

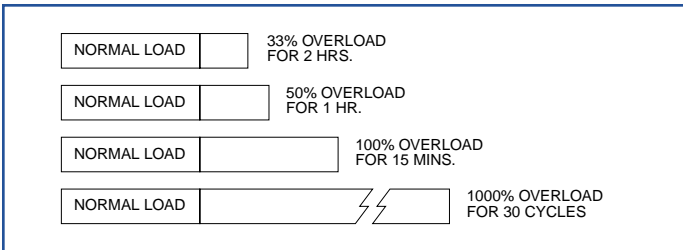


Accuracy

Staco regulators will maintain a constant output voltage within $\pm 1\%$ or better, regardless of input voltage variations from $+10\%$ to -20% of the nominal input value in standard models. If the supply voltage varies beyond the regulating range, the regulator continues to provide its maximum correction so that the output voltage varies only by the amount that the line voltage deviates beyond the regulating limits. The usefulness of this feature is best illustrated by a motor load which can operate satisfactorily on a supply voltage of 20% below nominal; using a Staco regulator, the same motor can be operated when the line voltage falls to 39% below nominal.

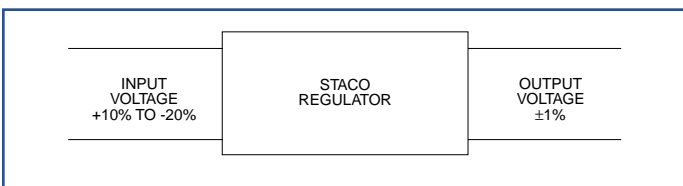


No Waveform Distortion– No Harmonics Added

Staco regulators, unlike some types of regulators, cause no waveform distortion and add no harmonics to the system. They do not introduce awkward and irritating errors in voltage and current measurement which may occur if the normal wave shape of the supply voltage is distorted.

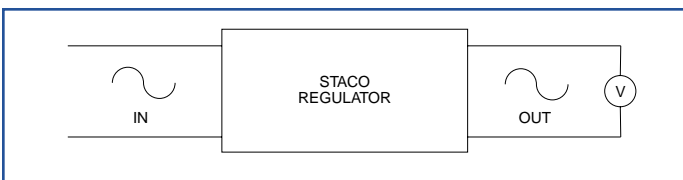


Independent of Power Factor

Staco regulators perform equally well whether the connected load is capacitive, resistive, or inductive in nature.

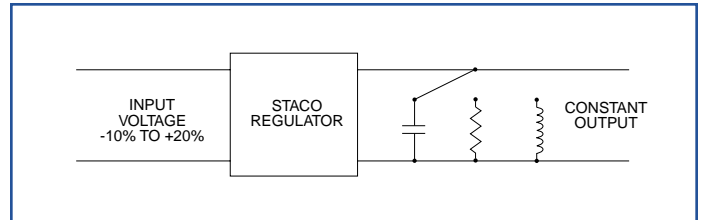


Insensitive to Frequency Changes

Staco manufactures regulators which will accept line frequency changes of up to $\pm 10\%$ without loss of output regulation.

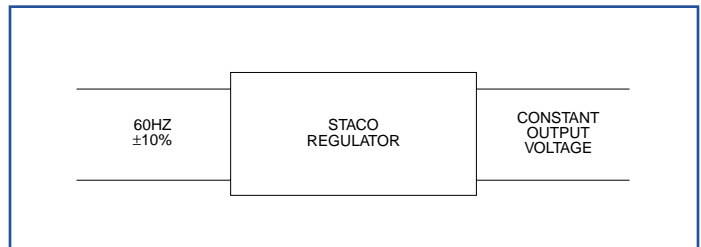


Compensates for Load Changes

Staco regulators maintain a constant output voltage regardless of load current changes from zero to full rated load.

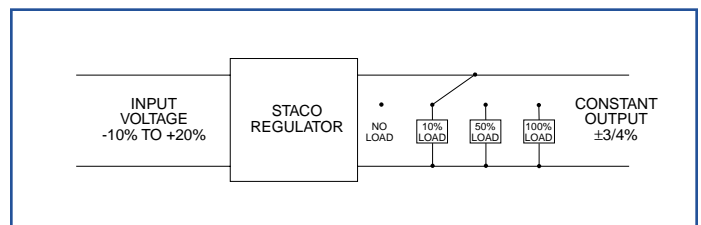

Rated per Industry Standards

Staco regulators are designed and rated to meet standard industry kVA ratings for application ease in both new and existing installations. No longer is there a need to oversize the regulator to be able to utilize the full capability of a feeder circuit.

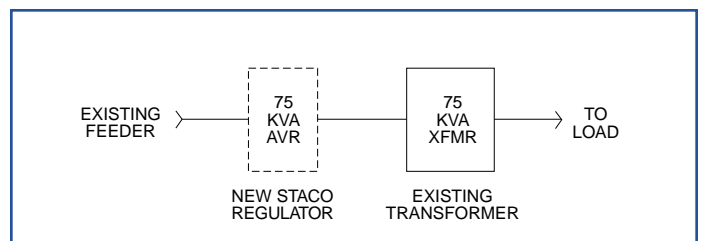

VOLTAGE REGULATOR and POWER CONDITIONER OPTIONS

EXTERNAL BYPASS SWITCH



The external bypass switch option is a mechanically interlocked three position "On", "Off", "Bypass" non-load break switch. Units are 600 volt class, 50/60 Hz rated. The bypass switch is enclosed in an indoor ventilated drip-proof enclosure with the operating handle located behind a removable front cover to limit unauthorized accessibility. Cable terminations are provided for system input, load output, plus AVR/PLC input and output. The external bypass switch is designed to provide complete electrical and mechanical isolation from the voltage regulator or power conditioner it controls. Dimensions may be found on page 19.

MICROPROCESSOR CONTROLLER



The type MP controller option offers an intelligent control that provides user control and monitoring locally through a panel mounted microterminal or remotely through its bi-directional communications port. The MP controller is user configurable to accept peak-to-peak, RMS, or average voltage feedback signals and provides for set point and dead-band adjustment. The MP controller is standard on individual phase controlled three phase MVR regulators, MLC power conditioners, and is available as an option on all other units. For additional information on the MP controller refer to the "MP Series Controllers", catalog 004-5007.

Phase	Amp Rating	Catalog Number	Ship Weight (lbs)
Single Phase *	65	MB-S65	30
	100	MB-S100	40
	200	MB-S200	70
Three Phase	65	MB-T65	140
	100	MB-T100	150
	200	MB-T200	310
	400	MB-T400	340
	600	MB-T600	360
	800	MB-T800	520

* Wall mounted units

TRANSIENT VOLTAGE SUPPRESSION

This option utilizes an encapsulated bi-directional, parallel transient suppression network circuit to provide protection from the damaging effects of transient voltage activity in the normal mode (L-N,L-L) and common mode (N-G,L-G). The transient voltage suppressors are UL1449 listed and exceed category C3 system exposure levels per ANSI/IEEE C62.41, 1991. All Staco Power Conditioners include this option as standard.

Not available on rack mount units.

Other Options Available

- Primary Circuit Breaker
- Secondary Circuit Breaker
- Special Input/Output metering
- Custom Designs
- Test Sets

GENERAL SPECIFICATIONS

AC INPUT CHARACTERISTICS

- Voltage:** Refer to Selection Charts
- Phase:** Refer to Selection Charts
- Frequency:** Refer to Selection Charts
- Voltage Range:** +10% to -20%, typical

SYSTEM CHARACTERISTICS


- Efficiency:**
 - Voltage Regulators: 99% typical, at full load
 - Power Conditioners: 97% typical, at full load
- Heat Dissipation:**
 - Voltage Regulators: 38 BTU/Hr/kVA, typical
 - Power Conditioners: 95 BTU/Hr/kVA, typical
- Impedance:**
 - Voltage Regulators: Less than 1%
 - Power Conditioners: Less than 3%
- Noise Attenuation:**
 - Voltage Regulators: 38 dB Common Mode (with TVSS option) 36 dB Transverse Mode
 - Power Conditioners: 120 dB Common Mode 60 dB Transverse Mode

AC OUTPUT CHARACTERISTICS




- Voltage:** 120 to 600 VAC
- Load kVA:** 2.5 to 500 kVA
- Load Current:** 10 to 1388 Amps
- Load Capacity:**
 - 33% Overload, 2 hours
 - 50% Overload, 1 hour
 - 100% Overload, 15 minutes
 - 1000% Overload, 30 cycles
- Load Power Factor:** 0 lagging to 0 leading
- Regulation:** $\pm 1\%$ or better
- Response:** Less than 2 cycles
- Correction Rate:** Refer to Selection Charts
- Harmonic Distortion:** None added

ENVIRONMENTAL

- Ambient Operating:**
 - Temperature: 0°C to 50°C
 - Relative Humidity: 0 to 95%, non-condensing
 - Operating Altitude: 10,000 feet



CIRCUIT DIAGRAMS

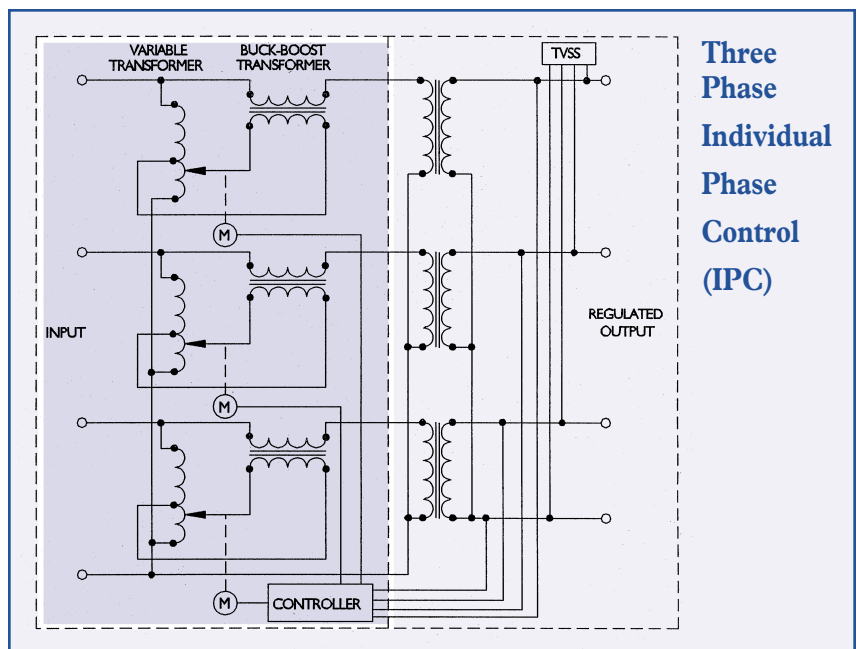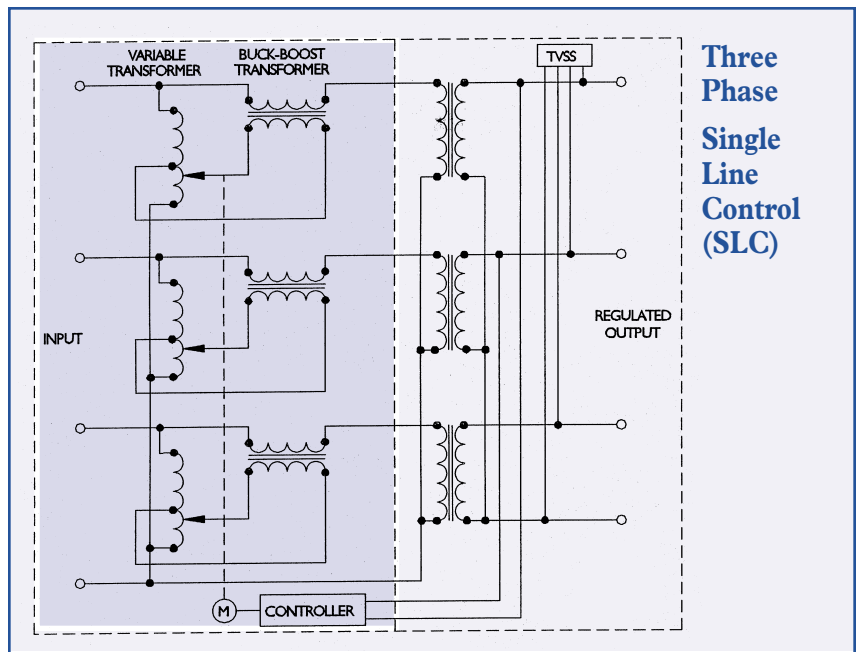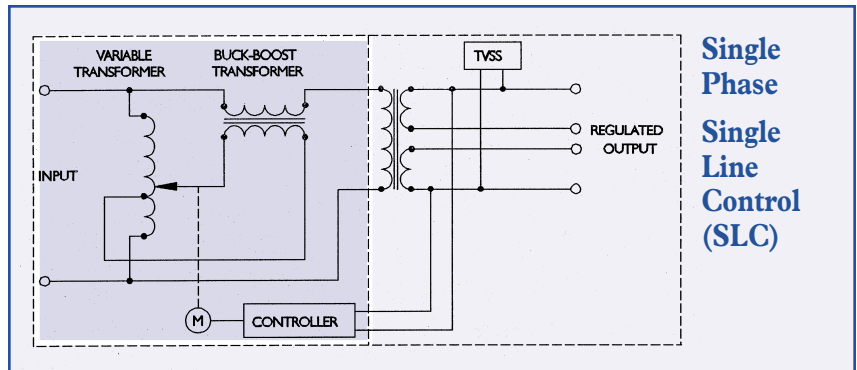

SELECTING STACO VOLTAGE REGULATORS and POWER CONDITIONERS

Selecting the Staco Voltage Regulator or Power Conditioner best suited to your specific requirements is easy once you make the following determinations:

VOLTAGE REGULATOR OR POWER CONDITIONER

The first step in the product selection process is to determine what type of product is required. A voltage regulator is designed to take the system input voltage and provide a regulated output voltage. The main difference between a regulator and a power conditioner is that a power conditioner also contains a transient voltage suppression package plus an output isolation transformer. A power conditioner provides output regulation plus load isolation and electrical noise attenuation. If system brownouts are the major concern, select a Voltage Regulator. If electrical noise, as well as brownouts, are the major application concern or if load isolation or system voltage step-down is required, choose a Power Conditioner. Voltage Regulator selection tables start on page 12 and the Power Conditioner selection tables start on page 16.

SINGLE OR THREE PHASE

The second step is to determine the type of load to be supplied. If the load is a single phase load, choose a single phase Regulator or Power Conditioner. If the load is three phase or is a combination of single and three phase loads, select a three phase unit. Product selection tables start with single phase units followed by three phase units.

VOLTAGE

The third step is to determine the selected unit's voltage rating. There are only a few different nominal system voltages used throughout the world. The basic product selection tables, starting on page 12, have been designed to meet 95% of the day-to-day needs. Staco Voltage Regulators, unlike some of the other regulator technologies, are designed with an adjustable output voltage setpoint. The charts below show standard output voltage setpoints available with the standard regulators listed in the selection tables. Using this output setpoint feature, 11 basic regulator voltage families can provide a $\pm 1\%$, or better, output regulation for 36 different world system voltages.

SINGLE PHASE • VOLTAGE REGULATORS

System	Output Voltage Setpoint	Base Unit Voltage	Input Voltage Range	Hz
(2 wire)	100	120 60 Hz *	80 - 110	50/60
	110		88 - 121	60
	115		92 - 26	60
	120		96 - 132	60
	200	240 60 Hz *	160 - 220	50/60
	208		166 - 229	60
	220		176 - 242	60
	230		184 - 253	60
	240	380 50/60 Hz	192 - 264	60
	347		278 - 381	50/60
	380		304 - 418	50/60
	400		320 - 440	50/60
	415		365 - 456	50/60
	440		352 - 484	60
	460		368 - 506	60
	480		384 - 528	60
	575	600 60 Hz	460 - 632	60
	600		480 - 660	60

THREE PHASE • VOLTAGE REGULATORS

System	Output Voltage Setpoint	Base Unit Voltage	Input Voltage Range	Hz
Delta (3 wire)	200	240 60 Hz	160 - 220	50/60
	220		176 - 242	60
	230		184 - 253	60
	240		192 - 264	60
	400	480 60 Hz	320 - 440	50/60
	415		365 - 456	50/60
	440		352 - 484	60
	480		384 - 528	60
Wye (4 wire)	200	208 60 Hz	160 - 220	60
	208		166 - 229	60
	220		176 - 242	60
	380	380 50/60 Hz	304 - 418	50/60
	400		320 - 440	50/60
	415		365 - 456	50/60
	440		352 - 484	60
	480		384 - 528	60
	575		460 - 632	60
	600		480 - 660	60


* Type SVR regulators are 50/60 Hz rated for all setpoint voltages.

Three phase system voltages are either Delta or Wye depending on whether a system neutral is available. A Delta system has only three conductors or wires. A Wye system has three conductors plus a system neutral. A Delta system is known as a three phase, three wire system, where the Wye system is known as a three phase, four wire system where the fourth wire is the system neutral. The type of three phase supply system must be determined for proper Voltage Regulator or Power Conditioner application. Staco offers both Delta and Wye three phase units as standard catalog items. Special voltage units are available, contact the factory for product information. Domestic units are 60 Hz rated and international units are 50/60 Hz rated.

SIZE

The fourth step in the selection process is to determine the unit's kVA rating. The product selection tables list both the unit's kVA rating and maximum output amperes. Knowing either the load kVA or amperes, select a unit that meets or exceeds the load requirements. The kVA ratings listed in the selection tables are based on a unit's maximum output ampere rating at its listed output voltage. If a Voltage Regulator is being selected based on the output set-point feature, the regulator should be selected based on the maximum output amperes which remain constant over the unit's output voltage setpoint range. The output kVA will then need to be recalculated based on the output voltage setpoint and the unit's maximum output amperes.

As a final step review the application to determine if any options are required.

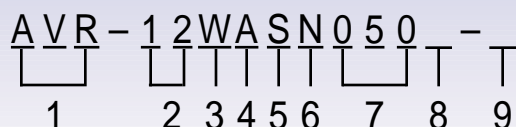

STACO CATALOG NUMBERING SYSTEM

To assist in the understanding of the Staco catalog numbering system, a brief explanation follows below:

1: Product Type

AVR -- Voltage Regulator, analog control
MVR -- Voltage Regulator, micro-processor control
PLC -- Power Conditioner, analog control
MLC -- Power Conditioner, micro-processor control
SVR -- Stepper Voltage Regulator
SLC -- Stepper Power Conditioner

2: Voltage

12 -- 12 to 120 volts
20 -- 208 to 208 volts
21 -- 240 to 120/240 volts
22 -- 240 to 208Y/120 volts
24 -- 240 to 240 volts
27 -- 277 to 277 volts
38 -- 380 to 380 volts
41 -- 480 to 120/240 volts
42 -- 480 to 208Y/120 volts
48 -- 480 to 480 volts
60 -- 600 to 600 volts
61 -- 600 to 120/240 volts
62 -- 600 to 208Y/120 volts

3: Input Range/Regulation

G -- +20% to -20%/ ±1%
H -- + 6% to -10%/ ±1%
N -- + 7% to -11%/ ±1%
P -- + 7% to -17%/ ±1%
Q -- + 10% to -10%/ ±1volt
T -- + 10% to -15%/ ±1volt
W -- + 10% to -20%/ ±1%
X -- + 25% to - 30%/ ±1%
Z -- + 15% to -15%/ ±1%
V -- + 15% to -30%/ ±1%

4: Phase/Hertz

A -- Single Phase, 60 Hertz
B -- Single Phase, 50/60 Hertz
C -- Three Phase, 60 Hertz
D -- Three Phase, 50/60 Hertz

5: Control

I -- Individual Phase Control
S -- Single Line Control

6: System

D -- Delta input, Delta Output
X -- Delta input, Wye Output
Y -- Wye input, Wye output
N -- Not used

7: KVA Rating

Actual unit kVA, max of four positions

8: Rack Mounted Unit

R -- only used when unit is rack mount type

9: Options

D -- Digital Meter
MA -- Analog Amp Meter
MAD -- Digital Amp Meter
O -- Output Contactor
P -- Primary Circuit Breaker
S -- Secondary Circuit Breaker
T -- Transient Suppression

Voltage Regulators • Single Phase

INPUT RANGE: +10%, -20% • OUTPUT REGULATION: ±1%



The SVR stepper voltage regulator is microprocessor controlled providing ±0.25% to 1%, output voltage regulation with full range correction in less than one second. The "SVR" is available, in ratings from 2.5 to 15 kVA, as a compact 19 inch rack mounted unit or as an enclosed indoor ventilated unit for bench or floor mounting. The output voltage regulation setpoint is adjustable through the front panel potentiometer or the SVR can be interfaced with a programmable controller providing a 0 to 5 VDC setpoint signal. Custom design SVR voltage regulators and full range voltage controllers are available for production testing and quality control applications.

System Voltage	kVA Rating	Max Output Amps	Catalog Number	Input Voltage Range	Correction Rate Seconds/Volt	Enclosure Dimensions (inches)			Ship Weight (lbs)	
						Size	H	W		D
120 volt 50/60 Hz Rack Mount (2 wire)	2.5	20.8	SVR-12WBSN002R	(96-132)	0.028	1R	10	19	10	90
	5	41.7	SVR-12WBSN005R	(96-132)	0.028	1R	10	19	10	100
	7.5	62.5	SVR-12WBSN007R	(96-132)	0.028	1R	10	19	10	110
	10	83.3	SVR-12PBSN010R †	(100-128)	0.036	1R	10	19	10	112
	15	125	SVR-12NBSN015R ‡	(107-128)	0.048	1R	10	19	10	115
120 Volt 60 Hz (2 wire)	2.5	20.8	SVR-12WBSN002	(96-132)	0.028	A	12	20	10	100
	5	41.7	SVR-12WBSN005	(96-132)	0.028	A	12	20	10	110
	7.5	62.5	SVR-12WBSN007	(96-132)	0.028	A	12	20	10	120
	10	83.3	SVR-12PBSN010 †	(100-128)	0.036	A	12	20	10	122
	15	125	SVR-12NBSN015 ‡	(107-128)	0.048	A	12	20	10	125
	25	208	AVR-12WASN025	(96-132)	0.143	E	34	37	25	520
	37.5	313	AVR-12WASN037	(96-132)	0.143	E	34	37	25	570
	50	417	AVR-12WASN050	(96-132)	0.143	E	34	37	25	710
240 volt 50/60 Hz Rack Mount (2 wire)	2.5	10.4	SVR-24WBSN002R	(192-264)	0.014	1R	10	19	10	90
	5	20.8	SVR-24WBSN005R	(192-264)	0.014	1R	10	19	10	100
	7.5	31.3	SVR-24PBSN007R †	(199-257)	0.017	1R	10	19	10	110
	10	41.7	SVR-24NBSN010R ‡	(214-257)	0.023	1R	10	19	10	112
	15	62.5	SVR-24HBSN015R #	(216-254)	0.026	1R	10	19	10	115
240 volt 60 Hz (2 wire)	2.5	10.4	SVR-24WBSN002	(192-264)	0.014	A	12	20	10	100
	5	20.8	SVR-24WBSN005	(192-264)	0.014	A	12	20	10	110
	7.5	31.3	SVR-24PBSN007 †	(199-257)	0.017	A	12	20	10	120
	10	41.7	SVR-24NBSN010 ‡	(214-257)	0.023	A	12	20	10	122
	15	62.5	SVR-24HBSN015 #	(216-254)	0.026	A	12	20	10	125
	25	104	AVR-24WASN025	(192-264)	0.069	E	34	37	25	360
	37.5	156	AVR-24WASN037	(192-264)	0.069	E	34	37	25	480
	50	208	AVR-24WASN050	(192-264)	0.069	E	34	37	25	520
	75	313	AVR-24WASN075	(192-264)	0.069	E	34	37	25	660
240 to 120/240 volt 60 Hz (2 wire)	2.5	10.4	SVR-21WBSN002	(192-264)	0.014	B	34	22	17	150
	5	20.8	SVR-21WBSN005	(192-264)	0.014	B	34	22	17	200
	7.5	31.3	AVR-21WASN007	(192-264)	0.069	C	53	22	17	390
	10	41.7	AVR-21WASN010	(192-264)	0.069	E	34	37	25	430
	15	62.5	AVR-21WASN015	(192-264)	0.069	E	34	37	25	490
	25	104	AVR-21WASN025	(192-264)	0.069	E	34	37	25	600
	37.5	156	AVR-21WASN037	(192-264)	0.069	F	53	37	25	820
	50	208	AVR-21WASN050	(192-264)	0.069	H	53	51	25	1010
	75	313	AVR-21WASN075	(192-264)	0.069	H	53	51	25	1350

† Input range is + 7%, - 17%

‡ Input range is + 7%, - 11%

Input range is + 6%, - 10%

Note: SVR units are 50/60 Hz rated

Voltage Regulators • Single Phase

INPUT RANGE: +10%, -20% • OUTPUT REGULATION: ±1%

Staco AVR voltage regulators are enclosed in an indoor ventilated enclosure designed to provide 100% front accessibility and to fit through a standard thirty inch wide door. All units are kVA rated per industry standards and for added application flexibility the output voltage regulation setpoint is adjustable. A brief discussion of the output setpoint feature along with single and three phase setpoint charts are covered in the voltage selection section on page 10. Staco voltage regulators are designed to provide ±1%, or better, output voltage regulation over the full input voltage range without any wave form distortion and without any harmonics added to the electrical system. Modular construction with 100% front accessibility makes Staco voltage regulators easy to install. By using a low impedance design, the typical Staco voltage regulator provides regulated output at 99% efficiency.



System Voltage	kVA Rating	Max Output Amps	Catalog Number	Input Voltage Range	Correction Rate Seconds/Volt	Enclosure Dimensions (inches)			Ship Weight (lbs)	
						Size	H	W		D
277 volt 60 Hz (2 wire)	2.5	9	AVR-27WASN002	(222-304)	0.061	B	34	22	17	130
	5	18.1	AVR-27WASN005	(222-304)	0.061	B	34	22	17	150
	7.5	27.1	AVR-27WASN007	(222-304)	0.061	B	34	22	17	160
	10	36.1	AVR-27WASN010	(222-304)	0.061	B	34	22	17	190
	15	54.2	AVR-27WASN015	(222-304)	0.061	B	34	22	17	210
	25	90.3	AVR-27WASN025	(222-304)	0.061	E	34	37	25	350
	37.5	135	AVR-27WASN037	(222-304)	0.061	E	34	37	25	470
	50	181	AVR-27WASN050	(222-304)	0.061	E	34	37	25	500
75	271	AVR-27WASN075	(222-304)	0.061	E	34	37	25	640	
380 volt 50/60 Hz (2 wire)	2.5	6.6	AVR-38WBSN002	(304-418)	0.044	B	34	22	17	130
	5	13.2	AVR-38WBSN005	(304-418)	0.044	B	34	22	17	140
	7.5	19.7	AVR-38WBSN007	(304-418)	0.044	B	34	22	17	150
	10	26.3	AVR-38WBSN010	(304-418)	0.044	B	34	22	17	160
	15	39.5	AVR-38WBSN015	(304-418)	0.044	B	34	22	17	200
	25	65.8	AVR-38WBSN025	(304-418)	0.044	E	34	37	25	330
	37.5	98.7	AVR-38WBSN037	(304-418)	0.044	E	34	37	25	350
	50	132	AVR-38WBSN050	(304-418)	0.044	F	53	37	25	470
75	197	AVR-38WBSN075	(304-418)	0.044	F	53	37	25	510	
480 volt 60 Hz (2 wire)	2.5	5.2	AVR-48WASN002	(384-528)	0.035	B	34	22	17	130
	5	10.4	AVR-48WASN005	(384-528)	0.035	B	34	22	17	150
	7.5	15.6	AVR-48WASN007	(384-528)	0.035	B	34	22	17	160
	10	20.8	AVR-48WASN010	(384-528)	0.035	B	34	22	17	200
	15	31.3	AVR-48WASN015	(384-528)	0.035	E	34	37	25	320
	25	52.1	AVR-48WASN025	(384-528)	0.035	E	34	37	25	350
	37.5	78.1	AVR-48WASN037	(384-528)	0.035	E	34	37	25	460
	50	104	AVR-48WASN050	(384-528)	0.035	F	53	37	25	490
75	156	AVR-48WASN075	(384-528)	0.035	F	53	37	25	620	
600 volt 60 Hz (2 wire)	2.5	4.2	AVR-60WASN002	(480-660)	0.028	B	34	22	17	130
	5	8.3	AVR-60WASN005	(480-660)	0.028	B	34	22	17	150
	7.5	12.5	AVR-60WASN007	(480-660)	0.028	B	34	22	17	160
	10	16.7	AVR-60WASN010	(480-660)	0.028	B	34	22	17	190
	15	25	AVR-60WASN015	(480-660)	0.028	E	34	37	25	320
	25	41.7	AVR-60WASN025	(480-660)	0.028	E	34	37	25	340
	37.5	62.5	AVR-60WASN037	(480-660)	0.028	E	34	37	25	460
	50	83.3	AVR-60WASN050	(480-660)	0.028	F	53	37	25	490
75	125	AVR-60WASN075	(480-660)	0.028	F	53	37	25	610	

Consult factory for higher ratings and custom designs

Voltage Regulators • Three Phase

INPUT RANGE: +10%, -20% • OUTPUT REGULATION: ±1%

Staco voltage regulators are designed to provide ±1%, or better, output voltage regulation, over the full input voltage range, without any wave form distortion or harmonics added. The modular constructed Staco voltage regulators are enclosed in an indoor ventilated enclosure designed to provide 100% front accessibility for ease of installation. The three phase product selection tables, that follow, include both Delta-Delta and Wye-Wye system configured units with Wye-Wye units available with either single line control or individual phase control. Standard Delta-Delta individual phase controlled units are available, please contact the factory for product information. The MP micro-processor controller is standard on all MVR three phase voltage regulators with individual phase control and is available as an option on single line controlled AVR units



System Voltage	kVA Rating	Max Output Amps	Catalog Number	Input Voltage Range	Correction Rate Seconds/Volt	Enclosure Dimensions (inches)			Ship Weight (lbs)	
						Size	H	W		D
208Y/120 V 60 Hz (Wye-Wye)	9	25	AVR-20WCSY009	(166-229)	0.079	B	34	22	17	270
	15	41.6	AVR-20WCSY015	(166-229)	0.079	B	34	22	17	310
	30	83.3	AVR-20WCSY030	(166-229)	0.079	E	34	37	25	630
	45	125	AVR-20WCSY045	(166-229)	0.079	F	53	37	25	690
	75	208	AVR-20WCSY075	(166-229)	0.079	F	53	37	25	1090
	112.5	312	AVR-20WCSY112	(166-229)	0.079	F	53	37	25	1190
	150	416	AVR-20WCSY150	(166-229)	0.079	G	71	37	25	1550
	225	625	AVR-20WCSY225	(166-229)	0.952	J	53	65	25	2040
300	833	AVR-20WCSY300	(166-229)	0.952	K	71	65	25	2430	
208Y/120 V 60 Hz (Wye-Wye)	9	25	MVR-20WCIY009	(166-229)	0.079	C	53	22	17	300
	15	41.6	MVR-20WCIY015	(166-229)	0.079	C	53	22	17	340
	30	83.3	MVR-20WCIY030	(166-229)	0.079	F	53	37	25	700
	45	125	MVR-20WCIY045	(166-229)	0.079	F	53	37	25	750
	75	208	MVR-20WCIY075	(166-229)	0.079	H	53	51	25	1150
	112.5	312	MVR-20WCIY112	(166-229)	0.079	H	53	51	25	1250
	150	416	MVR-20WCIY150	(166-229)	0.079	J	53	65	25	1640
	225	625	MVR-20WCIY225	(166-229)	0.079	J	53	65	25	2050
Individual Phase Control	300	833	MVR-20WCIY300	(166-229)	0.079	K	71	65	25	2450
	400	1110	MVR-20WCIY400	(166-229)	0.079	K	71	65	25	3100
	500	1388	MVR-20WCIY500	(166-229)	0.079	K	71	65	25	3770
240 V 60 Hz (Delta-Delta)	9	21.7	AVR-24WCSD009	(192-264)	0.069	B	34	22	17	270
	15	36.1	AVR-24WCSD015	(192-264)	0.069	B	34	22	17	300
	30	72.2	AVR-24WCSD030	(192-264)	0.069	E	34	37	25	630
	45	108	AVR-24WCSD045	(192-264)	0.069	F	53	37	25	680
	75	180	AVR-24WCSD075	(192-264)	0.069	F	53	37	25	1080
	112.5	271	AVR-24WCSD112	(192-264)	0.069	F	53	37	25	1170
	150	361	AVR-24WCSD150	(192-264)	0.069	G	71	37	25	1520
	225	541	AVR-24WCSD225	(192-264)	0.833	J	53	65	25	2000
300	722	AVR-24WCSD300	(192-264)	0.833	K	71	65	25	2390	
380Y/220 V 50/60 Hz (Wye-Wye)	9	13.7	AVR-38WDSY009	(304-418)	0.044	B	34	22	17	280
	15	22.8	AVR-38WDSY015	(304-418)	0.044	B	34	22	17	310
	30	45.6	AVR-38WDSY030	(304-418)	0.044	E	34	37	25	640
	45	68.4	AVR-38WDSY045	(304-418)	0.044	E	34	37	25	690
	75	114	AVR-38WDSY075	(304-418)	0.044	F	53	37	25	1090
	112.5	171	AVR-38WDSY112	(304-418)	0.044	F	53	37	25	1180
	150	228	AVR-38WDSY150	(304-418)	0.044	G	71	37	25	1540
	225	342	AVR-38WDSY225	(304-418)	0.526	J	53	65	25	2010
	300	456	AVR-38WDSY300	(304-418)	0.526	J	53	65	25	2390
	400	608	AVR-38WDSY400	(304-418)	0.526	K	71	65	25	3020
500	760	AVR-38WDSY500	(304-418)	0.526	K	71	65	25	3410	

System Voltage	kVA Rating	Max Output Amps	Catalog Number	Input Voltage Range	Correction Rate Seconds/Volt	Enclosure Dimensions (inches)				Ship Weight (lbs)
						Size	H	W	D	
380Y/220 V 50/60Hz (Wye-Wye)	9	13.7	MVR-38WDIY009	(304-418)	0.044	C	53	22	17	310
	15	22.8	MVR-38WDIY015	(304-418)	0.044	C	53	22	17	340
	30	45.6	MVR-38WDIY030	(304-418)	0.044	F	53	37	25	700
	45	68.4	MVR-38WDIY045	(304-418)	0.044	F	53	37	25	760
	75	114	MVR-38WDIY075	(304-418)	0.044	H	53	51	25	1150
	112.5	171	MVR-38WDIY112	(304-418)	0.044	H	53	51	25	1250
	150	228	MVR-38WDIY150	(304-418)	0.044	J	53	65	25	1630
	225	342	MVR-38WDIY225	(304-418)	0.044	J	53	65	25	2030
	300	456	MVR-38WDIY300	(304-418)	0.044	J	53	65	25	2410
	400	608	MVR-38WDIY400	(304-418)	0.044	K	71	65	25	3030
500	760	MVR-38WDIY500	(304-418)	0.044	K	71	65	25	3430	
480 V 60 Hz (Delta-Delta)	15	18	AVR-48WCSD015	(384-528)	0.035	B	34	22	17	290
	30	36.1	AVR-48WCSD030	(384-528)	0.035	E	34	37	25	610
	45	54.1	AVR-48WCSD045	(384-528)	0.035	E	34	37	25	660
	75	90.2	AVR-48WCSD075	(384-528)	0.035	F	53	37	25	740
	112.5	135	AVR-48WCSD112	(384-528)	0.035	F	53	37	25	1130
	150	180	AVR-48WCSD150	(384-528)	0.035	F	53	37	25	1200
	225	271	AVR-48WCSD225	(384-528)	0.035	G	71	37	25	1590
	300	361	AVR-48WCSD300	(384-528)	0.417	J	53	65	25	2030
	400	481	AVR-48WCSD400	(384-528)	0.417	J	53	65	25	2420
	500	600	AVR-48WCSD500	(384-528)	0.417	K	71	65	25	3020
480Y/227 V 60 Hz (Wye-Wye)	15	18	AVR-48WCSY015	(384-528)	0.035	B	34	22	17	290
	30	36.1	AVR-48WCSY030	(384-528)	0.035	E	34	37	25	610
	45	54.1	AVR-48WCSY045	(384-528)	0.035	E	34	37	25	660
	75	90.2	AVR-48WCSY075	(384-528)	0.035	F	53	37	25	740
	112.5	135	AVR-48WCSY112	(384-528)	0.035	F	53	37	25	1130
	150	180	AVR-48WCSY150	(384-528)	0.035	F	53	37	25	1200
	225	271	AVR-48WCSY225	(384-528)	0.035	G	71	37	25	1590
	300	361	AVR-48WCSY300	(384-528)	0.417	J	53	65	25	2030
	400	481	AVR-48WCSY400	(384-528)	0.417	J	53	65	25	2420
	500	600	AVR-48WCSY500	(384-528)	0.417	K	71	65	25	3020
480Y/277 V 60 Hz (Wye-Wye)	15	18	MVR-48WCIY015	(384-528)	0.035	C	53	22	17	330
	30	36.1	MVR-48WCIY030	(384-528)	0.035	F	53	37	25	680
	45	54.1	MVR-48WCIY045	(384-528)	0.035	F	53	37	25	730
	75	90.2	MVR-48WCIY075	(384-528)	0.035	F	53	37	25	800
	112.5	135	MVR-48WCIY112	(384-528)	0.035	H	53	51	25	1190
	150	180	MVR-48WCIY150	(384-528)	0.035	H	53	51	25	1260
	225	271	MVR-48WCIY225	(384-528)	0.035	J	53	65	25	1680
	300	361	MVR-48WCIY300	(384-528)	0.035	J	53	65	25	2050
	400	481	MVR-48WCIY400	(384-528)	0.035	J	53	65	25	2430
	500	600	MVR-48WCIY500	(384-528)	0.035	K	71	65	25	3030
600Y/347 V 60 Hz (Wye-Wye)	30	28.9	AVR-60WCSY030	(480-660)	0.028	E	34	37	25	610
	45	43.3	AVR-60WCSY045	(480-660)	0.028	E	34	37	25	660
	75	72.2	AVR-60WCSY075	(480-660)	0.028	E	34	37	25	730
	112.5	108	AVR-60WCSY112	(480-660)	0.028	F	53	37	25	1120
	150	144	AVR-60WCSY150	(480-660)	0.028	F	53	37	25	1190
	225	217	AVR-60WCSY225	(480-660)	0.028	G	71	37	25	1580
	300	289	AVR-60WCSY300	(480-660)	0.333	J	53	65	25	2010
	400	385	AVR-60WCSY400	(480-660)	0.333	J	53	65	25	2390
500	481	AVR-60WCSY500	(480-660)	0.333	K	71	65	25	2980	
600Y/347 V 60 Hz (Wye-Wye)	30	28.9	MVR-60WCIY030	(480-660)	0.028	F	53	37	25	670
	45	43.3	MVR-60WCIY045	(480-660)	0.028	F	53	37	25	720
	75	72.2	MVR-60WCIY075	(480-660)	0.028	F	53	37	25	800
	112.5	108	MVR-60WCIY112	(480-660)	0.028	H	53	51	25	1180
	150	144	MVR-60WCIY150	(480-660)	0.028	H	53	51	25	1250
	225	217	MVR-60WCIY225	(480-660)	0.028	J	53	65	25	1670
	300	289	MVR-60WCIY300	(480-660)	0.028	J	53	65	25	2030
	400	385	MVR-60WCIY400	(480-660)	0.028	J	53	65	25	2400
500	481	MVR-60WCIY500	(480-660)	0.028	K	71	65	25	3000	

Power Conditioners • Single Phase

INPUT RANGE: +10%, -20% • OUTPUT REGULATION: $\pm 1\%$



The modular voltage regulator provides the basic building block for the type SLC, PLC, and MLC power conditioners. A power conditioner consists of a voltage regulator with the addition of an output isolation transformer and a transient voltage suppression package. In addition to providing $\pm 1\%$, or better, output regulation without any wave form distortion or harmonics added, Staco power conditioners also provide electrical isolation and noise attenuation plus voltage suppression. The standard output isolation transformer is of a special design to provide 120 dB common mode and 60 dB transverse mode noise attenuation with the voltage suppression package rated for C3 system exposure level. Single phase power conditioners listed below, 240 volts and above, are designed to provide either 2 wire or 3 wire output. Standard three phase units are designed for a 3 wire Delta input with a 4 wire Wye output, and all individual phase controlled units are type MP microprocessor controlled. For three phase Wye-Wye units as well as other single or three phase ratings, contact the factory for dimensions and specifications.

System Voltage	kVA Rating	Max Output Amps	Catalog Number	Input Voltage Range	Correction Rate Seconds/Volt	Enclosure Dimensions (inches)			Ship Weight (lbs)	
						Size	H	W		D
120 to 120 V 60 Hz (2 wire)	5	41.7	SLC-12WBSN005	(96-132)	0.028	B	34	22	17	150
	7.5	62.5	SLC-12WBSN007	(96-132)	0.028	B	34	22	17	200
	10	83.3	PLC-12WASN010	(96-132)	0.139	F	53	37	25	410
	15	125	PLC-12WASN015	(96-132)	0.139	F	53	37	25	470
	25	208	PLC-12WASN025	(96-132)	0.139	F	53	37	25	590
	37.5	313	PLC-12WASN037	(96-132)	0.139	F	53	37	25	800
240 to 120/240 V 60 Hz (2 wire)	50	417	PLC-12WASN050	(96-132)	0.139	H	53	51	25	1000
	5	20.8	SLC-21WBSN005	(192-264)	0.014	B	34	22	17	270
	7.5	31.3	PLC-21WASN007	(192-264)	0.069	C	53	22	17	400
	10	41.7	PLC-21WASN010	(192-264)	0.069	D	53	31	17	440
	15	62.5	PLC-21WASN015	(192-264)	0.069	F	53	37	25	500
	25	104	PLC-21WASN025	(192-264)	0.069	F	53	37	25	610
480 to 120/240 V 60 Hz (2 wire)	37.5	156	PLC-21WASN037	(192-264)	0.069	F	53	37	25	830
	50	208	PLC-21WASN050	(192-264)	0.069	H	53	51	25	1020
	75	313	PLC-21WASN075	(192-264)	0.069	H	53	51	25	1360
	5	20.8	PLC-41WASN005	(384-528)	0.035	C	53	22	17	370
	7.5	31.3	PLC-41WASN007	(384-528)	0.035	C	53	22	17	500
	10	41.7	PLC-41WASN010	(384-528)	0.035	F	53	37	25	540
600 to 120/240 V 60 Hz (2 wire)	15	62.5	PLC-41WASN015	(384-528)	0.035	F	53	37	25	600
	25	104	PLC-41WASN025	(384-528)	0.035	F	53	37	25	710
	37.5	156	PLC-41WASN037	(384-528)	0.035	F	53	37	25	930
	50	208	PLC-41WASN050	(384-528)	0.035	H	53	51	25	1120
	75	313	PLC-41WASN075	(384-528)	0.035	H	53	51	25	1460
	600 to 120/240 V 60 Hz (2 wire)	5	20.8	PLC-61WASN005	(480-660)	0.028	C	53	22	17
7.5		31.3	PLC-61WASN007	(480-660)	0.028	C	53	22	17	500
10		41.7	PLC-61WASN010	(480-660)	0.028	F	53	37	25	540
15		62.5	PLC-61WASN015	(480-660)	0.028	F	53	37	25	700
25		104	PLC-61WASN025	(480-660)	0.028	F	53	37	25	810
37.5		156	PLC-61WASN037	(480-660)	0.028	F	53	37	25	1030
	50	208	PLC-61WASN050	(480-660)	0.028	H	53	51	25	1220
	75	313	PLC-61WASN075	(480-660)	0.028	H	53	51	25	1560

Note: SLC units are 50/60 Hz rated

Power Conditioners • Three Phase


INPUT RANGE: +10%, -20% • OUTPUT REGULATION: ±1%

System Voltage	kVA Rating	Max Output Amps	Catalog Number	Input Voltage Range	Correction Rate Seconds/Volt	Enclosure Dimensions (inches)				Ship Weight (lbs)
						Size	H	W	D	
208 to 208Y/120 V 60 Hz (Delta-Wye)	9	25	PLC-20WCSX009	(166-229)	0.079	D	53	31	17	620
	15	41.6	PLC-20WCSX015	(166-229)	0.079	D	53	31	17	650
	30	83.3	PLC-20WCSX030	(166-229)	0.079	F	53	37	25	1040
	45	125	PLC-20WCSX045	(166-229)	0.079	G	71	37	25	1170
	75	208	PLC-20WCSX075	(166-229)	0.079	I	71	51	25	1790
	112.5	312	PLC-20WCSX112	(166-229)	0.079	I	71	51	25	2070
208 to 208Y/120 V 60 Hz (Delta-Wye) IPC	150	416	PLC-20WCSX150	(166-229)	0.079	I	71	51	25	2620
	9	25	MLC-20WCIX009	(166-229)	0.079	D	53	31	17	630
	15	41.6	MLC-20WCIX015	(166-229)	0.079	D	53	31	17	660
	30	83.3	MLC-20WCIX030	(166-229)	0.079	G	71	37	25	1070
	45	125	MLC-20WCIX045	(166-229)	0.079	I	71	51	25	1200
	75	208	MLC-20WCIX075	(166-229)	0.079	I	71	51	25	1800
240 to 208Y/120 V 60 Hz (Delta-Wye)	112.5	312	MLC-20WCIX112	(166-229)	0.079	I	71	51	25	2080
	150	416	MLC-20WCIX150	(166-229)	0.079	I	71	51	25	2640
	9	25	PLC-22WCSX009	(192-264)	0.069	D	53	31	17	600
	15	41.6	PLC-22WCSX015	(192-264)	0.069	D	53	31	17	650
	30	83.3	PLC-22WCSX030	(192-264)	0.069	F	53	37	25	1040
	45	125	PLC-22WCSX045	(192-264)	0.069	G	71	37	25	1160
480 to 208Y/120 V 60 Hz (Delta-Wye)	75	208	PLC-22WCSX075	(192-264)	0.069	I	71	51	25	1770
	112.5	312	PLC-22WCSX112	(192-264)	0.069	I	71	51	25	2050
	150	416	PLC-22WCSX150	(192-264)	0.069	I	71	51	25	2600
	9	25	PLC-42WCSX009	(384-528)	0.035	D	53	31	17	610
	15	41.6	PLC-42WCSX015	(384-528)	0.035	D	53	31	17	640
	30	83.3	PLC-42WCSX030	(384-528)	0.035	F	53	37	25	1020
480 to 208Y/120 V 60 Hz (Delta-Wye)	45	125	PLC-42WCSX045	(384-528)	0.035	G	71	37	25	1140
	75	208	PLC-42WCSX075	(384-528)	0.035	G	71	37	25	1600
	112.5	312	PLC-42WCSX112	(384-528)	0.035	I	71	51	25	2010
	150	416	PLC-42WCSX150	(384-528)	0.035	I	71	51	25	2290
	225	625	PLC-42WCSX225	(384-528)	0.035	I	71	51	25	3080
	480 to 208Y/277 V 60 Hz (Delta-Wye) IPC	9	25	MLC-42WCIX009	(384-528)	0.035	D	53	31	17
15		41.6	MLC-42WCIX015	(384-528)	0.035	D	53	31	17	650
30		83.3	MLC-42WCIX030	(384-528)	0.035	G	71	37	25	1050
45		125	MLC-42WCIX045	(384-528)	0.035	I	71	51	25	1180
75		208	MLC-42WCIX075	(384-528)	0.035	I	71	51	25	1500
112.5		312	MLC-42WCIX112	(384-528)	0.035	I	71	51	25	2020
480 to 480Y/277 V 60 Hz (Delta-Wye)	150	416	MLC-42WCIX150	(384-528)	0.035	I	71	51	25	2310
	225	625	MLC-42WCIX225	(384-528)	0.035	I	71	51	25	3120
	9	10.8	PLC-48WCSX009	(384-528)	0.035	D	53	31	17	610
	15	18	PLC-48WCSX015	(384-528)	0.035	D	53	31	17	640
	30	36.1	PLC-48WCSX030	(384-528)	0.035	F	53	37	25	1020
	45	54.1	PLC-48WCSX045	(384-528)	0.035	G	71	37	25	1140
600 to 208Y/120 V 60 Hz (Delta-Wye)	75	90.2	PLC-48WCSX075	(384-528)	0.035	G	71	37	25	1470
	112.5	135	PLC-48WCSX112	(384-528)	0.035	I	71	51	25	2010
	150	180	PLC-48WCSX150	(384-528)	0.035	I	71	51	25	2290
	225	271	PLC-48WCSX225	(384-528)	0.035	I	71	51	25	3080
	9	25	PLC-62WCSX009	(480-660)	0.028	D	53	31	17	610
	15	41.6	PLC-62WCSX015	(480-660)	0.028	D	53	31	17	640
600 to 208Y/120 V 60 Hz (Delta-Wye)	30	83.3	PLC-62WCSX030	(480-660)	0.028	G	71	37	25	1040
	45	125	PLC-62WCSX045	(480-660)	0.028	I	71	51	25	1160
	75	208	PLC-62WCSX075	(480-660)	0.028	I	71	51	25	1480
	112.5	312	PLC-62WCSX112	(480-660)	0.028	I	71	51	25	2000
	150	416	PLC-62WCSX150	(480-660)	0.028	I	71	51	25	2280
	225	625	PLC-62WCSX225	(480-660)	0.028	I	71	51	25	3060
600 to 208Y/120 V 60 Hz (Delta-Wye) IPC	9	25	MLC-62WCIX009	(480-660)	0.028	D	53	31	17	620
	15	41.6	MLC-62WCIX015	(480-660)	0.028	D	53	31	17	650
	30	83.3	MLC-62WCIX030	(480-660)	0.028	G	71	37	25	1050
	45	125	MLC-62WCIX045	(480-660)	0.028	I	71	51	25	1170
	75	208	MLC-62WCIX075	(480-660)	0.028	I	71	51	25	1500
	112.5	312	MLC-62WCIX112	(480-660)	0.028	I	71	51	25	2020
600 to 208Y/120 V 60 Hz (Delta-Wye) IPC	150	416	MLC-62WCIX150	(480-660)	0.028	I	71	51	25	2290
	225	625	MLC-62WCIX225	(480-660)	0.028	K	71	65	25	3100






Consult factory for higher ratings and custom designs

OUTLINE DIMENSIONS

SIZE 1R

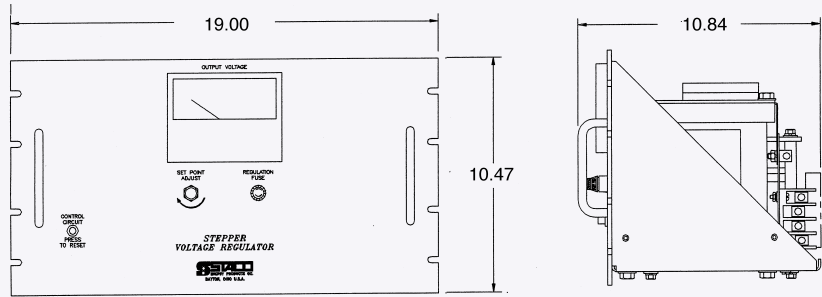

SIZE A

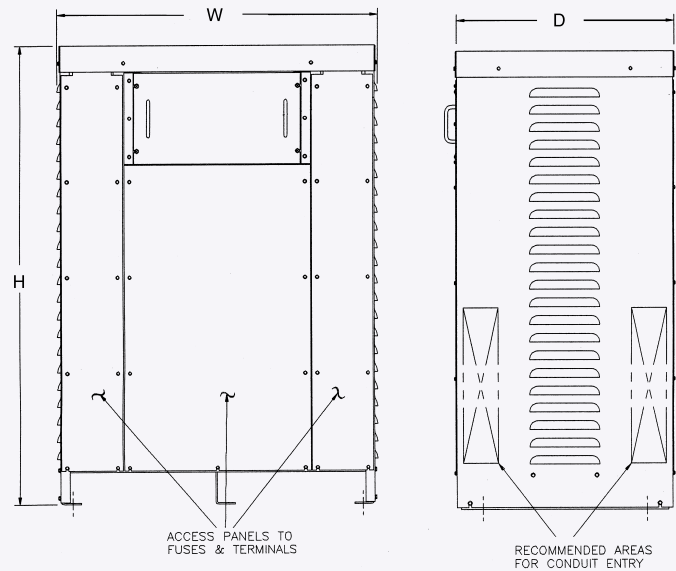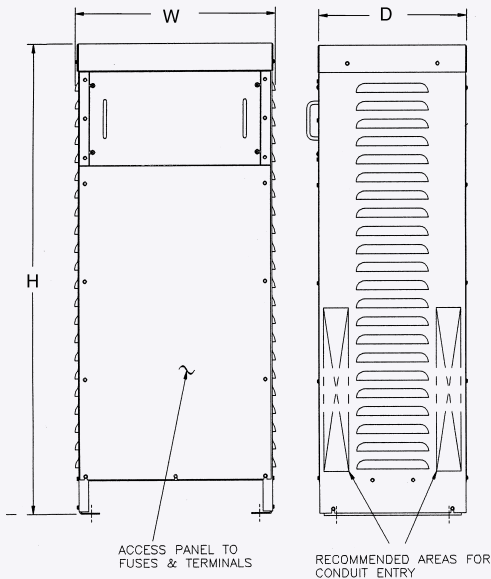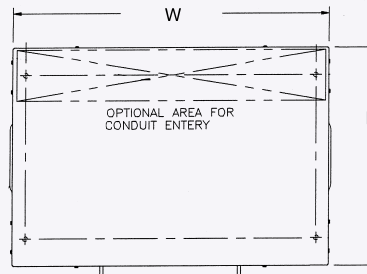
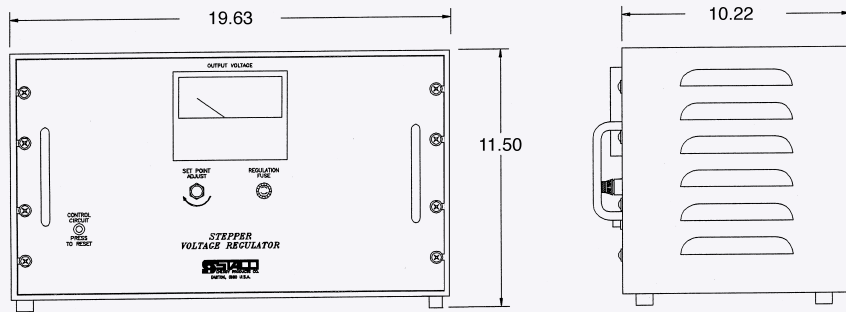


DIMENSIONS (INCHES)

SIZE	H	W	D
B	33.50	22.27	16.50
C	52.50	22.27	16.50
D	52.50	30.90	16.50

DIMENSIONS (INCHES)

SIZE	H	W	D
E	33.50	36.52	25.00
F	52.50	36.52	25.00
G	70.50	36.52	25.00

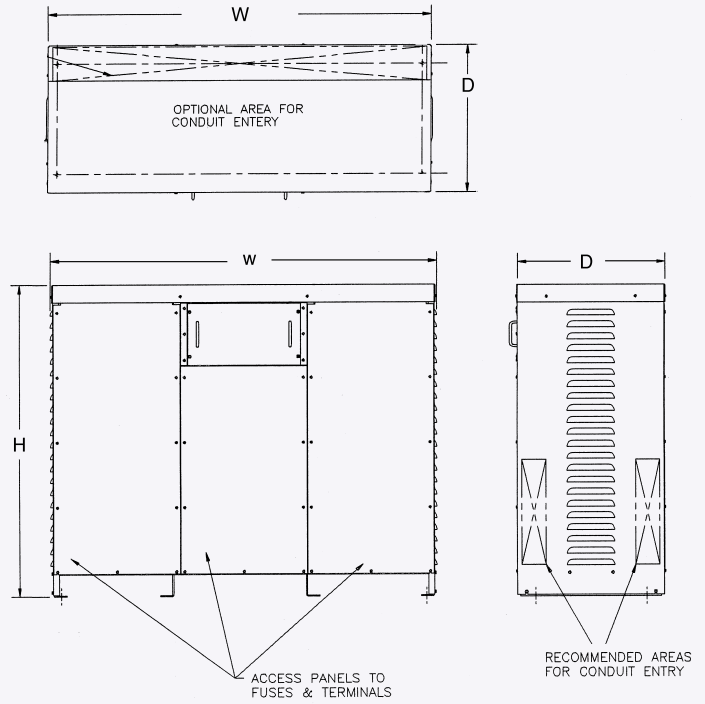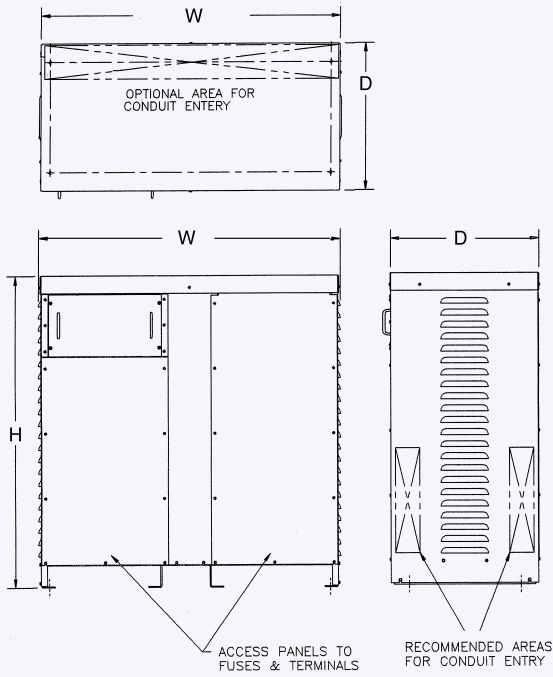


DIMENSIONS (INCHES)

Size	H	W	D
H	52.50	50.77	25.00
I	70.50	50.77	25.00


DIMENSIONS (INCHES)

Size	H	W	D
J	52.50	65.02	25.00
K	70.50	65.02	25.00

Wall Mounted Bypass Switch, Single Phase

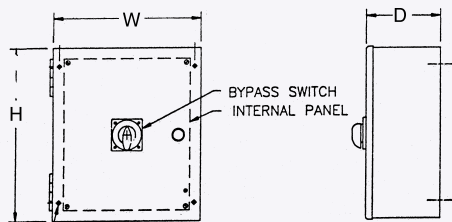

Bypass Switch, Three Phase

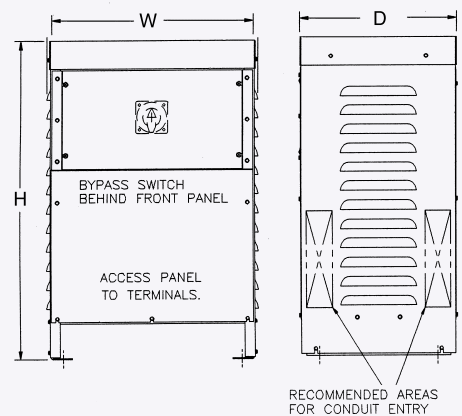

DIMENSIONS (INCHES)

Amp Rating	H	W	D
65, 100	14	12	6
200	24	20	11

DIMENSIONS (INCHES)

Amp Rating	H	W	D
65, 100	34	22	17
200, 400, 600	53	22	25
800	71	37	25