



Go to VARIAC.com to purchase and for technical support. Made in the USA

UNIT IS SUPPLIED WITH A 3.50 [95.2] DIA. 0-100 GRADUATED DIAL PLATE FOR PANEL MOUNTING.

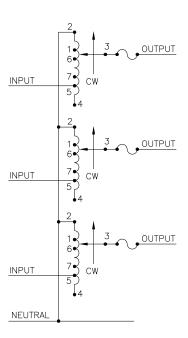

SCHEMATIC THREE PHASE WYE FUSES RECOMMENDED BUT NOT SUPPLIED

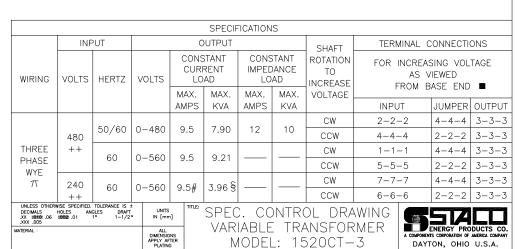



3/6/97 | FIRST USED ON | 1520CT-3

WEIGHT APPROX. CODE IDENT. NO. 83008

SCALE .50=1 SHEET 1 OF 1 D 031-3975

RAWN BY S.A. SMITH

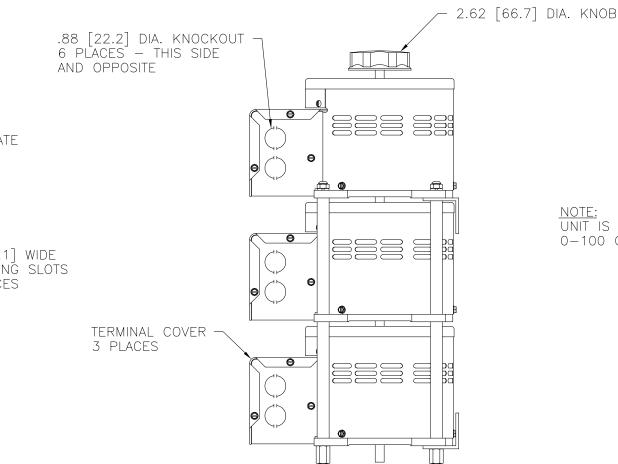



.38 [9.5] DIA. SHAFT -

FIGURE A MAXIMUM OUTPUT CURRENT OF ANY
DUAL INPUT VOLTAGE OR VOLTAGE DOUBLER
UNIT OPERATED AT LOWER INPUT VOLTAGE.

- # MAXIMUM OUTPUT CURRENT IN OUTPUT VOLTAGE RANGE FROM 0 TO 25% ABOVE LINE VOLTAGE. AT HIGHER OUTPUT VOLTAGES, THE OUTPUT CURRENT MUST BE REDUCED ACCORDING TO THE DERATING CURVE FIGURE A.
- § MAXIMUM KVA AT MAXIMUM OUTPUT VOLTAGE AND CORRESPONDING DERATED OUTPUT CURRENT. MAXIMUM KVA FOR LOWER VOLTAGES MAY BE CALCULATED FROM DERATING CURVE FIGURE A.
- ++ LINE TO LINE VOLTAGE.
- π if ganged units are used in a system that ordinarily has a common NEUTRAL OR GROUND BETWEEN SOURCE AND LOAD, THE NEUTRAL OR GROUND MUST BE CONNECTED TO THE COMMON TERMINALS OF THE VARIABLE TRANSFORMER ASSEMBLY. IF THE SYSTEM HAS NO NEUTRAL, THE LOAD MUST BE BALANCED OR THE TRANSFORMER WILL BE DAMAGED
- JUMPER PROVIDED IN STANDARD COMMON POSITION AND SHOULD BE MOVED OR REMOVED AS REQUIRED.

			NAMEPLATE	
17.31	[439.7] 16.15 [[410.1] 8.76 [222.6] 1.50 [38.1]	.28 [7.1] WIDE MOUNTING SLOTS 4 PLACES - 6.25 [158.7] - 7.25 [184.2]	TERMINAL COV 3 PLACES
	8.77 [222.7] 4.75 [120.7]	4.31 [109.6] 1/4-28 X .38 [9.5] THREADED STANDOFF 4 PLACES] DEEP # MAXIMU

3.31 [84.1]

.12 [3.2]

(

4.75 [120.7]

.94 [23.8]