

Rustrak 292

Miniature Event Strip Chart Recorders



The Rustrak 292 recorders are versatile low cost solutions monitoring up to 8 on/off events.


- **Wide input ranges**
- **Uses pressure sensitive paper.**
- **No pens to refill or replace.**
- **Rugged construction**

Technical Data

Features

Chart Speeds	1"/Hr standard, 1/48" to 240"/Hr optional. Speed can be changed in field with plug-in gear trains available separately.
Printing System	Stylus on pressure sensitive chart paper (continuous contact).
Power Supply	120V/60Hz standard; 240/60Hz, 120V/50Hz, 240V/50Hz optional.
Recording Width	Approx. 1/16" per channel
Chart Paper Feed	Internal re-roll or tear-off modes. (User configurable)
Repetition Rate	Up to 10 times per second
Operating Environment	Indoor (Outdoor with suitable enclosure)
Operating Temperature	0-50C (32-122F)
Storage Temperature	-40 to 70C (-40 to 158F)
Dimensions	3-5/8"W x 5-5/8"H x 6"D
Approximate Weight	4.8 lbs.

Model	Configurations Input	No. of Channels
292-TTL-4	3-50V (AC/DC) @ 6K ohm	4
292-TTL-8	3-50V (AC/DC) @ 6K ohm	8
292-HIV-4	50-500V (AC/DC) @ 100K ohm	4
292-HIV-8	50-500V (AC/DC) @ 100K ohm	8

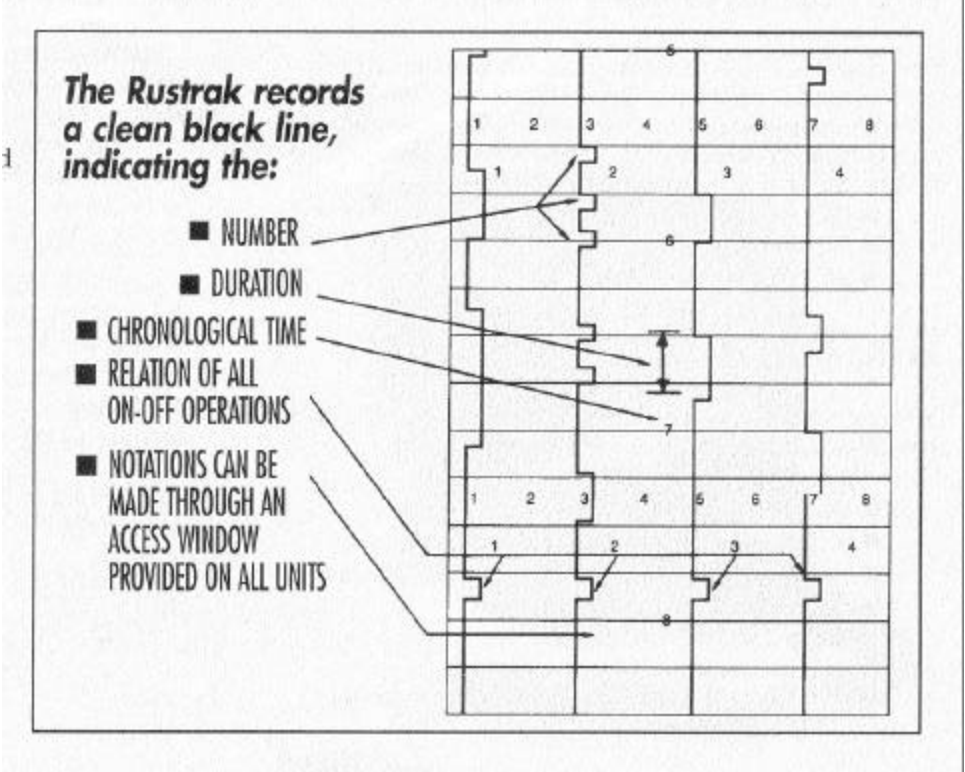

To order specify:

- 1) Model Number (see above table)
- 2) Power supply voltage
- 3) Desired chart speed (1"/hour is standard)

<http://instserv.com>

ISE, Inc.
 10100 Royalton Rd.
 Cleveland, OH 44133 USA
 Tel: (440) 237-3200 • Fax: (440) 237-1744

Toledo, OH area:
 417 Tomahawk Dr.
 Maumee, OH 43537
 Tel: (419) 893-3330 • Fax: (419) 893-2151