

ISE, Inc.


AC Current Monitoring Light



Tenor Model KCL-5M, AC current monitoring light indicates current flow to motors, heaters, or other current application devices by induction. Typical indicating lights signal only that the switch function has been performed and it has provided power to the light. It does not indicate that the device being powered is drawing current.

The KCL-5M provides indication that the device being monitored is drawing current. The cost of scrap, lost time, or damage to equipment resulting from a non-running motor or malfunctioning heater can be greatly reduced with the installation of a Tenor KCL-5M. Priced well below current meters, traditionally used to check flow to a load, the Tenor KCL-5M installs without a wire splice and has a neon indicating lamp rated @ 15,000 hours. Installation requires a one (1") inch diameter panel hole, and the unit requires less than two (2") inches back panel space.

TYPICAL APPLICATIONS: Heaters, motors (including 3-phase), lamps or other current application devices.

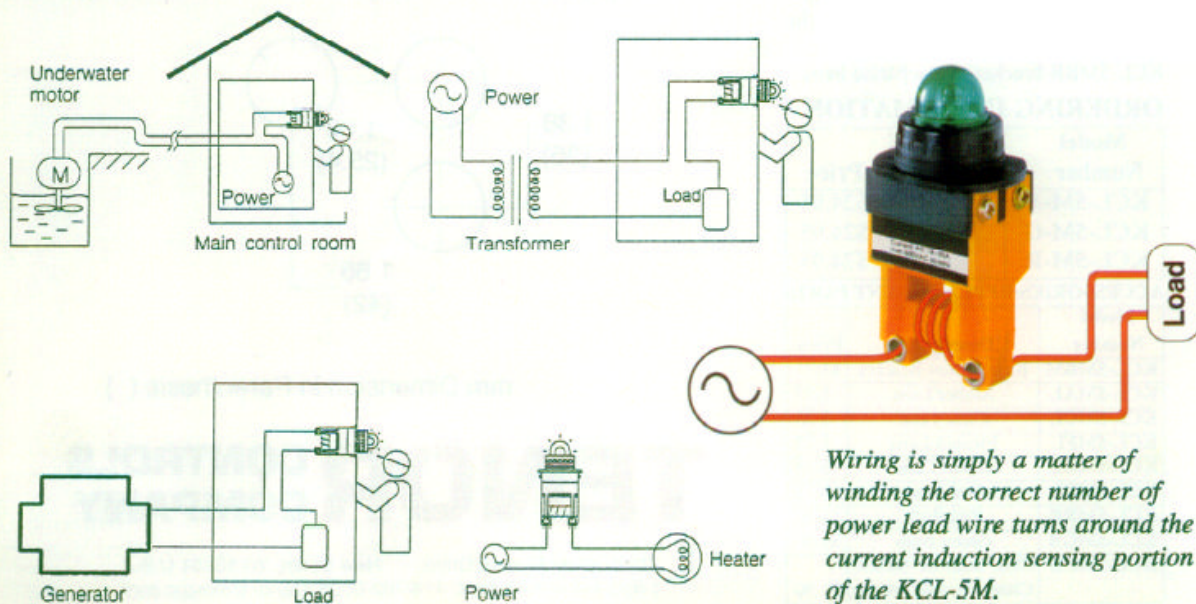

SPECIFICATIONS

POWER

600Vac Max. 50/60 Hz.

RATED CURRENT

1 to 20A

APPLICATION METHOD

No direct connection to current conducting wire.

MAX. PEAK CURRENT

15 times of rated current

MOUNTING

Through hole panel mount; Base mount; optional bracket

LENS COLORS


Standard—Red, Amber, Green; Optional: Clear. Frosted

INDICATING LIGHT (NEON LAMP) LIFE EXPECTANCY

Approx. 15,000 hours—Replaceable

BASE MOUNTING


BRACKET ACCESSORY

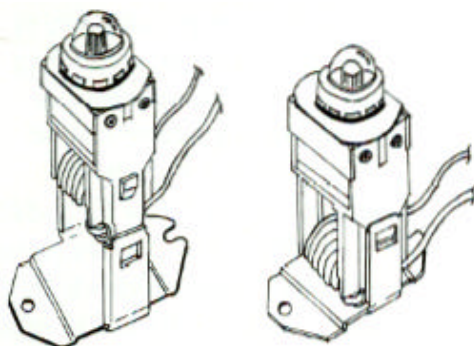

A base mounting bracket (KCL-5MBR) is available for applications where panel mounting is not appropriate. The AC current monitoring indicating light snaps into the base mount bracket and is held secure by mounting “ears located on the side of the light assembly. Order the KCL-5MBR bracket as a separate item.

HOW TO WIRE



Wind the wire round the current—induction part of the light as shown in the illustration. If the lamp is overly bright or hazy when a set number of wire turns are applied, reduce turns to dim indicator or increase to brighten.

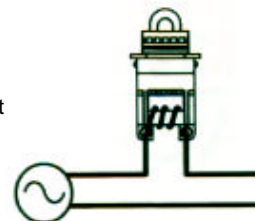

TYPICAL WIRE—TURN GUIDE

Resistive Load		Motor Load	
1A	20-23 times	0.2kw	15-16 times
2A	10-12 times	0.4kw	12-14 times
3A	7-8 times	0.75kw	9-10 times
4A	5-6 times	1.5kw	6-7 times
5A-6A	4-5 times	2.2kw	4-5 times
7A-9A	3 times	3.7kw	2-3 times
10A-19A	2 times	5.5kw	2 times
20A	1 time	7.5kw	2 times

DIMENSIONS

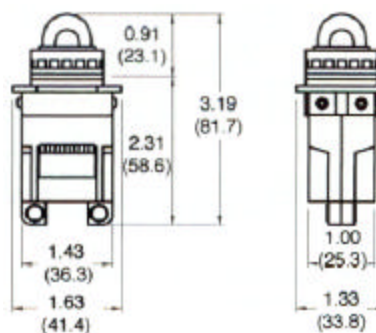

mm Dimension in Parenthesis ()

Ordering Information

Model Lens Color

KCL-5M-A Amber
 KCL-5M-G Green
 KCL-5M-R Red

Accessories/Replacement Parts

P/N Description

KCL-5MBM **Base Mount Bracket**
 KCL-5M*L **Lens:** Replace * with A for Amber, C for Clear, G for Green, R for Red
 KCL-5M*B **Bulb:** Replace * with C for Amber, C for Clear, G for Green, R for Red

ISE, Inc.

10100 Royalton Rd.
 Cleveland, OH 44133 USA

Tel: (440) 237-3200 • Fax: (440) 237-1744

Toledo, OH area:
 417 Tomahawk Dr.
 Maumee, OH 43537

Tel: (419) 893-3330 • Fax: (419) 893-2151