

TOWER LIGHTS



IP 56

Buzzer
80dB/m

MT5C / 8C Series

Ø56mm & Ø85mm

Each Stack Jumper Selectable for
Steady or Flash

- Prism-cut lenses for superior light distribution
- Mounting: Surface, pole or wall mount (order separately)
- One to five light stacks
- Buzzer kit available
- Colors available: blue, clear, green, red & yellow
- IP 56 / UL NEMA 12, 3R
- Screw terminal or wire leads




| Stacks | Ø56mm | Ø85mm | Voltage | Current Draw | Wattage | Replacement Parts | |
|------------|-----------------|-----------------|-----------|-------------------------------|---|-------------------|-------------------|
| | | | | | | Bulb | Lens |
| 1 Stack | MT5C1A(Δ)-R | MT8C1A(Δ)-R | 24 VDC/AC | 0.4A | 10 watt | MAB-T15-D-024-10 | 56 mm MAL-5(□) |
| | MT5C1B(Δ)-R | MT8C1B(Δ)-R | 120 VAC | 0.08A | | MAB-T15-D-120-10 | |
| | MT5C1C(Δ)-R | MT8C1C(Δ)-R | 240 VAC | 0.04A | | MAB-T15-D-240-10 | |
| 2 Stack | MT5C2A(Δ)-RG | MT8C2A(Δ)-RG | 24 VDC/AC | 0.8A | | MAB-T15-D-024-10 | |
| | MT5C2B(Δ)-RG | MT8C2B(Δ)-RG | 120 VAC | 0.16A | | MAB-T15-D-120-10 | |
| | MT5C2C(Δ)-RG | MT8C2C(Δ)-RG | 240 VAC | 0.08A | | MAB-T15-D-240-10 | |
| 3 Stack | MT5C3A(Δ)-RYG | MT8C3A(Δ)-RYG | 24 VDC/AC | 1.2A | | MAB-T15-D-024-10 | 85mm MAL-8(□) |
| | MT5C3B(Δ)-RYG | MT8C3B(Δ)-RYG | 120 VAC | 0.24A | | MAB-T15-D-120-10 | |
| | MT5C3C(Δ)-RYG | MT8C3C(Δ)-RYG | 240 VAC | 0.12A | | MAB-T15-D-240-10 | |
| 4 Stack | MT5C4A(Δ)-RYGB | MT8C4A(Δ)-RYGB | 24 VDC/AC | 1.6A | | MAB-T15-D-024-10 | |
| | MT5C4B(Δ)-RYGB | MT8C4B(Δ)-RYGB | 120 VAC | 0.32A | | MAB-T15-D-120-10 | |
| | MT5C4C(Δ)-RYGB | MT8C4C(Δ)-RYGB | 240 VAC | 0.16A | | MAB-T15-D-240-10 | |
| 5 Stack | MT5C5A(Δ)-RYGBC | MT8C5A(Δ)-RYGBC | 24 VDC/AC | 2.0A | | MAB-T15-D-024-10 | |
| | MT5C5B(Δ)-RYGBC | MT8C5B(Δ)-RYGBC | 120 VAC | 0.4A | | MAB-T15-D-120-10 | |
| | MT5C5C(Δ)-RYGBC | MT8C5C(Δ)-RYGBC | 240 VAC | 0.2A | | MAB-T15-D-240-10 | |
| Buzzer Kit | MPZ-56A | MPZ-85A | 24 VDC/AC | Sound Level 80dB (85mA) | (□) – Indicate color of lens: B, C, G, R, or Y | | |
| | MPZ-56B | MPZ-85B | 120 VAC | | | | |
| | MPZ-56C | MPZ-85C | 240 VAC | | | | |

(Δ) – Indicate L – Leads out or T - Terminal

DIMENSIONS

Unit: mm

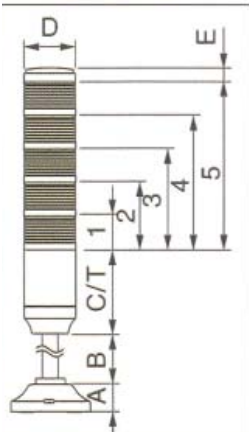

| (Unit: mm) | MT5C | MT8C |
|------------|------|------|
| A | 29 | 29 |
| B | 200 | 200 |
| C | 95 | 108 |
| •T | 173 | 188 |
| D | 56 | 85 |
| E | 15 | 15 |
| 1 | 68 | 68 |
| 2 | 136 | 136 |
| 3 | 204 | 204 |
| 4 | 272 | 272 |
| 5 | 340 | 340 |

♦ Terminal board version

MOUNTING OPTIONS (see page 11)

| Base | | Pole | |
|--------------|-----------------------------|----------|---------------------------|
| MAM-B070 | Surface mount (plastic) | MAP-0022 | 22mm pole |
| | | MAP-0240 | 240mm pole |
| MAM-DS23-20 | Surface mount (aluminum) | MAP-0750 | 750mm pole |
| | | MAP-1000 | 1000mm pole |
| MAM-DS25 | 90° bracket (steel) | MAP-M043 | 43mm pole with 1 nut |
| MAM-DS30-BLK | 90° bracket (plastic) | MAP-M240 | 240mm pole with 2 nuts |



♦ 10100 Royalton Road • Cleveland OH 44133 • (440) 237-3200 • Fax (440) 237-1744
 ♦ 417 Tomahawk Drive • Maumee OH 43537 • (419) 893-3330 • Fax (419) 893-2151
 ♦ Web site: www.iseinc.com • E-mail: isetoledo@iseinc.com • Toll Free: (877) 893-3330