#### MODEL **ZF1** SERIES Power Controls Single-Phase Zero-Fired Models Rated 60 - 1200 Amperes

The **ZF1 Series** are single-phase zero-fired SCR Power Controls designed to deliver maximum power control with all the features normally found in much larger units. Utilizing only four frame sizes, these units are conservatively engineered for years of trouble-free service while providing the benefits of precise, reliable control for your electrical process.

The ZF1 Series accepts all standard voltage and current command signals or a remote potentiometer input. The 4-20 mA command signal is optically isolated. Standard operating voltages are 120, 240, 400, 480 & 575 Vac, 3 Phase, 50/60 Hz. Other voltages are available.

Multi-turn zero and span adjustments are provided for matching the SCR power control to the command signal. Control power, command signal and blown fuse indicators are provided as a means for trouble shooting. The control power indicator (red) indicates power has been applied to the unit. The command signal indicator's (green) brilliance is proportional to the output voltage. The blown fuse indicators (3-yellow) light if a fuse is cleared.



# MODEL ZF1

- Electrically Isolated Heat Sinks (60-225A)
- Conservative Thermal Desig
- Compact Size
- Voltage Squared Linearity
- Line Voltage Compensation
- Transient Voltage Protection (RC & MOV)
- 1400 PIV SCRs
- Semiconductor (l<sup>2</sup>t) Fuse
- Diagnostic Indicators
- Optically Isolated Input Command Signal (4-20 mA)
- Multi-Turn Zero & Span Adjustments
- Silkscreen Printed Circuit Boards
- UL,cUL Listed, CE Compliant
- 5 year "No Hassle" warranty
- Fan Cooled (90A and higher)


### **Applications:**


Primarily used to control static resistive or non-inductive loads.

- Small electric furnaces
- Electric ovens, kilns & heaters
- Extrusion or injection molding




Depth: 9.25

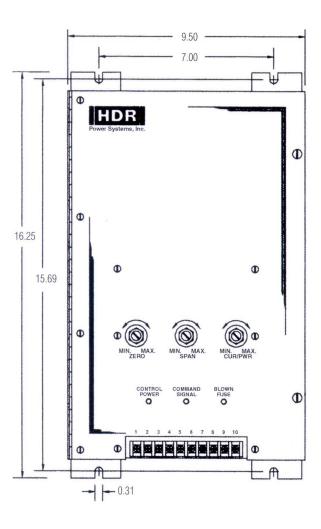


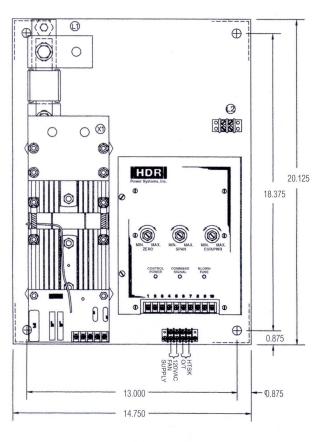

#### Model ZF1 350-500A

Depth: 8.500

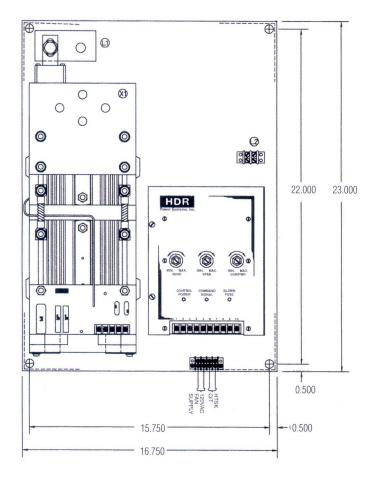

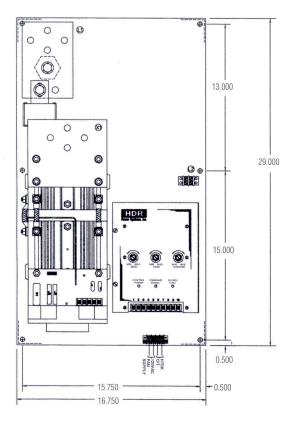

### Model ZF1650A

Depth: 8.5

## Model ZF1 800-1200A

Depth: 8.5

### **SPECIFICATIONS:**

Control Method:	Zero-firing of back-to-back SCRs	Isolation:	2500 volts rms from power circuit to command signal and to ground
Voltage Rating:	120, 240, 400, 480, 575 Vac, 50/60 Hz,	Adjustments:	Zero and span, multi-turn
Current Ratings:	60, 90, 120, 180, 225, 350, 500, 650, 800, 1000, 1200 Amperes	Ambient Temperature:	Operating: 0° to 50° C Storage: -10° to 70° C
Command Signal:	Most standard process	Relative Humidity:	0 to 95% (non-condensing)
	signals	Weights:	60-225A22 lbs.350-500A24 lbs.650A47 lbs.

#### **HOW TO ORDER:**

Make one selection from each of the tables shown. Place the selections in the corresponding boxes to build your model number.



120	60	An
240	90	An

120 Vac	120
240 Vac	240
400 Vac	400
480 Vac	480
575 Vac	575

\*Other voltages available

CURRENT	TABLE

60	Amps	60
90	Amps	90
120	Amps	120
180	Amps	180
225	Amps	225
350	Amps	350
500	Amps	500
650	Amps	650
800	Amps	800
1000	Amps	1000
1200	Amps	1200

N.O. Thermostat
N.C. Thermostat
SCR Failure Alarm
Load Unbalance Alarm
Lug Kit (greater than 225A)

4-20 mA (Self Powered)	01
0-10 VDC	02
0-5 VDC	03
Auto/Man	04
*Manual Pot Input	05
Others	06-99

 $^{\Delta}$  Thermostat included above 60A Specify N.O. or N.C.

\*Requires external potentiometer (5k)

Specifications subject to change without notice



2

**3** OPTION TABLE<sup>A</sup>

N.O. Thermostat
N.C. Thermostat
SCR Failure Alarm
Load Linhalanco Alarm

CR Failure Alarm	SF
oad Unbalance Alarm	UB
ug Kit (greater than 225A)	LG



NO

NC

800-1200A

5

ZF1-

#### **4** COMMAND SIGNAL TABLE

71 lbs.