

NEW



## 6700+ Limit Control

### 1/16 DIN Limit Controller

#### DESCRIPTION

The West 6700+ is part of a range of new generation '+' Series limit devices that share the same distinctive styling as the '+' Series temperature controllers.

The expanded '+' Series limit controller platform includes 1/4, 1/8 and 1/16 DIN models that incorporate numerous product specification, communication, display interface and software improvements that surpass competitive limit device offerings in ease of use, delivery and value-per dollar characteristic of the growing '+' Series product family.

By adding more versatile features and user-friendly functionality like digital inputs, an easy-to-use HMI, jumperless and auto-hardware configuration, 24VDC transmitter power supply and MODBUS communication across the range - the new generation West + Series limit controllers transform the complicated into the simple while saving you time (as much as 50% on product set-up), reducing inventory stock and virtually eliminating the likelihood of operator errors.

The + Series limit controllers are affordable, well-featured, easy to use and adaptable with performance features that work for you to make limit control simple.

#### APPLICATIONS:

Fail-safe protection device to prevent damage to equipment or products. It will shut down a process when a preset temperature is reached and cannot be reset by the operator until the process has returned to a safe condition.

#### INDUSTRIES

- Industrial and lab ovens/furnaces
- Plastics and thermal forming
- Packaging applications
- And any other where protection against out-of-range temperature condition is a critical requirement

#### FEATURES/BENEFITS

- **NEW** Improved easy-to-use HMI
- **NEW** Jumperless input configuration
- **NEW** Auto-hardware recognition
- **NEW** Improved Windows PC configuration software
- Process alarms
- Optional digital input and remote reset
- Optional 10V SSR driver output
- Faster communication speeds in selectable MODBUS or ASCII format
- FM Approved
- Backward compatible panel cutout, housing and terminal wiring capability

**WEST™ brand**

**6700+™**

**Affordable, Well-Featured,  
Easy to Use and Adaptable**

**1/16 DIN Limit Controller**

**SPECIFICATIONS\***

**STANDARD FEATURES**

4 per second input sample rate  
 Universal input  
**NEW** Improved HMI, 4 button operation, dual 4-digit LED display  
**NEW** Plug-in output modules – install just the function needed  
**NEW** Jumperless input configuration  
**NEW** Auto-detection of installed output modules  
**NEW** Improved PC configuration software  
 Process alarms  
**Construction/Enclosure:** Rugged ABS Plastic housing

**ENVIRONMENTAL CHARACTERISTICS**

**Operating Temp:** 32° to 131°F (0° to 55°C)  
**Storage Temp:** -4° to 176°F (-20° to 80°C)  
**Humidity:** 20% to 95% non-condensing RH

**ELECTRICAL**

**Supply Voltage:** 100-240V, 50/60Hz, Optional 20-48VAC 50/60Hz or 22-65VDC  
**Power Consumption:** 5W / 7.5 VA Maximum

**DISPLAY:**

**Type:** Red or Green, 7 segment LED, 4 digit upper and lower displays  
**Height:** 10mm (0.39") upper display, 8mm (0.31") lower display  
**Annunciators:** 5 LED indicators for output and status

**INPUTS**

**T/C's:** J, T, K, L, N, B, R, S, C; Pt Rh20% vs. Pt 40% Rh  
**RTD:** 3-wire, PT100  
**DC Linear (Scalable –1999 to +9999)**  
**Volts:** 0-5V, 1-5V, 0-10V, 2-10V  
**DC milliamps:** 0-20mA or 4-20mA  
**DC millivolts:** 0-50mV, 10-50mV

**OUTPUTS**

Output 1 (limit relay) fixed; outputs 2 and 3 (alarm relay) are user-selectable and customized based on desired application; choose from the following output types  
**Max # of Outputs:** 3 for alarm, 24 VDC transmitter power supply or retransmit of process value/limit trip setpoint  
**Limit Relay:** SPDT; 240VAC 5A resistive; Lifetime >100,000 operations at rated voltage/current  
**Alarm Relay:** Optional SPDT; 240VAC 2A resistive; Lifetime >500,000 operations at rated voltage/current  
**SSR Drive:** Optional drive capability: >10 VDC nominal into 500 ohm minimum  
**DC Linear:** Optional 0-20mA, 4-20mA into 500 ohm max; 0-10V, 1-5V, 2-10V, 0-5V into 500 ohm min; Outputs have 2% over/under drive applied; Accuracy +-0.25% (mA into 250 ohm load, V into 2k ohm load); degrading linearity to +-0.5% for increasing burden to specified limits  
**Triac:** Optional 0.01 to 1A AC, 20 to 280Vrms, 47-63 Hz (Limit 2)  
**Transmitter Power Supply:** Optional 24 VDC (Limit 1)

**OUTPUT FUNCTIONS**

**Process Alarm:** (reverse or direct)  
**Modes (Alarm 1 and 2):** High/Low, Band, Deviation, logical OR/AND  
**Retransmit:** Process value or limit setpoint

**ELECTRICAL PERFORMANCE**

**Accuracy:** ± 0.1% of input range ± 1 LSD (T/C CJC better than 1 degree C)  
**Input sample rate:** 4 per second, 14 bit resolution  
**Impedance:** >10M ohm for the thermocouple and mV ranges, 47k ohm for V ranges and 5 ohm for mA ranges  
**Sensor Break Detection:** <2 seconds (except zero based DC ranges), limit output opens, low alarms activate for RTD, mA or V ranges

**COMMUNICATIONS INTERFACE**

**User-selectable:** 2-wire, RS-485 serial communications option with choice of Modbus RTU or ASCII protocol; 1200 to 19200 baud  
**PC Configuration:** Offline configuration from serial port to dedicated configuration socket (comms option not required)

**RATINGS/AGENCY APPROVALS**

**Conformance:** FM, CE, UR, cUR UL File # 67237  
**Safety:** EN61010  
**EMC:** EN61326

**PROTECTION**

IEC IP66 (NEMA 4X) front panel  
 IEC IP20 (behind the panel protection)

**PHYSICAL DIMENSIONS**

**Panel Cutout:** 1.77" x 1.77" (45mm x 45mm)  
**Height:** 1.89" (48mm)  
**Width:** 1.89" (48mm)  
**Depth:** 4.33" (110mm)  
**Weight:** 0.46 lbs (0.21 kg)  
**Mounting:** Plug in panel with fixing strap

**OPTIONS/ACCESSORIES**

**Digital Input 1 (Optional):** remote reset  
**NEW** Faster RS-485 serial communication speeds and user-selectable (Modbus or ASCII) option  
**NEW** 24VDC transmitter power supply option  
**Choice of Led colors:** red/red, red/green, green/red, green/green  
 10VDC SSR Drive output

**WARRANTY**

3 Years

\* Specifications are for base models with standard features only unless otherwise noted. Specifications subject to change without notice in accordance with our DBS policy of continuous improvement. All product and brand names are trademarks of their respective owners. All rights reserved.

West™ brand and 6700+™ are trademarks of Danaher Industrial Controls Group. All rights reserved.

© 2005 DICG Corp.


West Brand 6700+ Data Sheet (7/05)

1/16 DIN Limit Controller

MODELS

Code 1: Model #	Code 2: Input Type	Code 3: Output 1	Code 4: Output 2	Code 5: Output 3	Code 6: Options	Code 7: Power Supply	Code 8: Display Color	Code 9: Option Slot B
<b>P6701Z</b>	<input type="checkbox"/>	<input type="checkbox"/> <b>1</b>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> <b>0</b> <input type="checkbox"/> <b>0</b>
I/16 DIN Limit Controller includes: jumperless input configuration, auto-detection hardware and improved PC configuration software	1 3-Wire RTD or DC mV 2 Thermocouple 3 DC mA 4 DC Voltage	1 Limit relay output (fixed)	0 Not fitted 1 Relay Output 2 DC Drive SSR Output 3 Linear 0-10V DC Output 4 Linear 0-20mA DC Output 5 Linear 0-5V DC Output 6 Linear 2-10V DC Output 7 Linear 4-20mA DC Output 8 Triac Output	0 Not fitted 1 Relay Output 2 DC Drive SSR Output 3 Linear 0-10V DC Output 4 Linear 0-20mA DC Output 5 Linear 0-5V DC Output 6 Linear 2-10V DC Output 7 Linear 4-20mA DC Output 8 Transmitter Power Supply	0 Not fitted 1 RS-485 Serial Communication 3 Digital Input	0 100-240 AC 2 24-48 AC or DC	0 Red upper and Lower 1 Green upper and lower 2 Red upper, Green lower 3 Green upper, Red lower	00 Not fitted

DIMENSIONS - 1/16 DIN

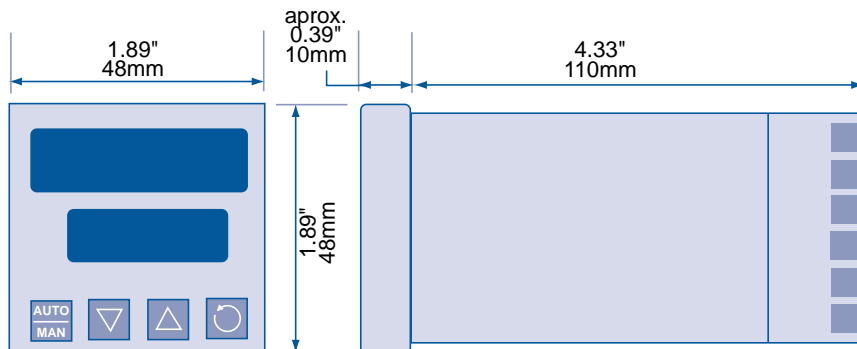

\* Specifications are for base models with standard features only unless otherwise noted. Specifications subject to change without notice in accordance with our DBS policy of continuous improvement. All product and brand names are trademarks of their respective owners. All rights reserved.

West™ brand and 6700+™ are trademarks of Danaher Industrial Controls Group. All rights reserved.

© 2005 DICG Corp.

West Brand 6700+ Data Sheet (7/05)